


**CASE SPECIFICATIONS:**

**REFRIGERATION**  
 LOAD: 9,160 BTU/hr  
 SUCTION TEMP: 20° F  
 LIQUID LINE: 3/8IN ODS  
 SUCTION LINE: 5/8IN ODS

**ELECTRICAL** 115VAC, 60HZ, 1PH.  
 EVAP. FANS: 2.54A, MCA 15A  
 LIGHT BALLAST: 1.5A, MCA 15A

**ADDITIONAL CONECTIONS FOR:**

LIQUID LINE SOLENOID VALVE  
 DISCHARGE AIR PROBE  
 REAR FAN CONTROL RELAY

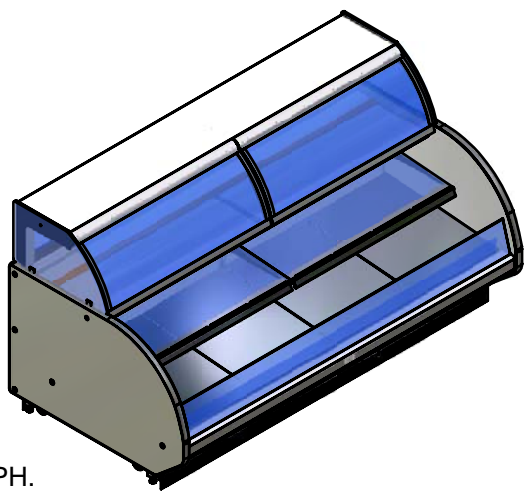

**NOTES:**

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

		Borgen Systems 1901 Bell Avenue, Suite 2 Des Moines, IA 50315 <a href="http://www.borgensystems.com">www.borgensystems.com</a>	
DATE:	2/17/2005	DRAWN BY:	DWT
<b>8' FOOD LOW DOMED BG8LD</b>			
DIM:	INCH	DRAWING NUMBER:	
TOL:	+/- 1/32	<b>4624A</b>	