

CASE SPECIFICATIONS:

REFRIGERATION:
LOAD: 14,175 BTU/hr

SUCTION TEMP: 20°F
SUCTION LINE: 5/8IN ODS
LIQUID LINE: 3/8IN ODS


ELECTRICAL 115V, 60HZ, 1PH
EVAP. FANS: 2.16A
LIGHT BALLASTS: 2.3A
LIGHT TRANSFORMERS: 2.6A
TOTAL: 7.06A
MCA: 15.0A

CASE SPECIFICATIONS:

REFRIGERATION:
LOAD: 14,175 BTU/hr


SUCTION TEMP: 20°F
SUCTION LINE: 5/8IN ODS
LIQUID LINE: 3/8IN ODS

ELECTRICAL 115V, 60HZ, 1PH
EVAP. FANS: 2.16A
LIGHT BALLASTS: 2.3A
LIGHT TRANSFORMERS: 2.6A
TOTAL: 7.06A
MCA: 15.0A

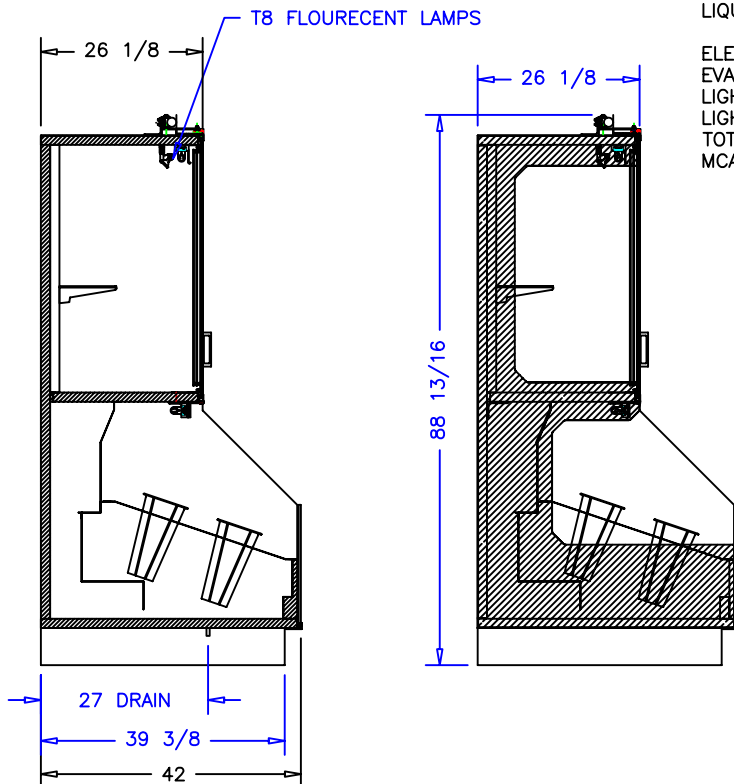

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

				börger systems	
		SCALE: 1:32			DRAWN BY: A. BESIC
		DATE: 4-14-06			CHECKED BY:
		10DR, 20FT HUTCH			
DATE	REV.	Dim:	INCH	DRAWING NUMBER	
REVISION		TOL:		P4835A	