
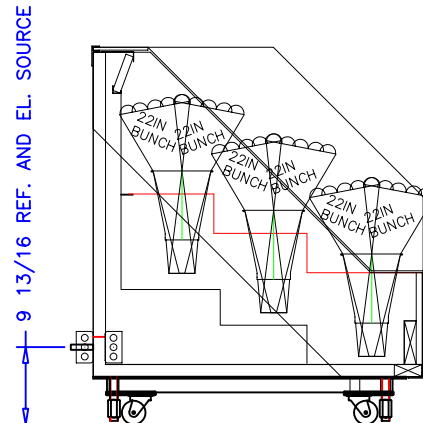


CASE SPECIFICATIONS:


REFRIGERATION
 LOAD: 12,600 BTU/hr
 SUCTION TEMP: 20° F
 LIQUID LINE: 3/8IN ODS
 SUCTION LINE: 5/8IN ODS

ELECTRICAL 115V, 60HZ, 1PH.
 EVAP. FANS: .52A
 TOTAL: .52A

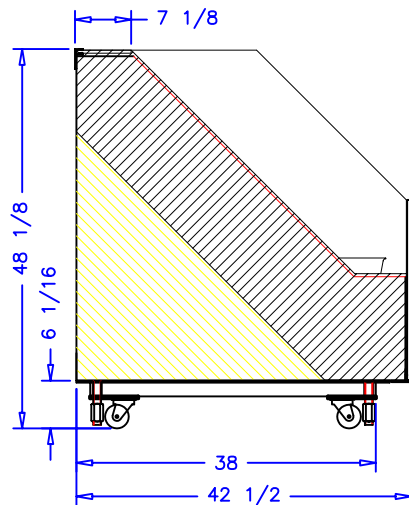

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 INCH NATIONAL PIPE STRAIGHT THREAD.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

| | | | |
|----------|------|---|-------------------|
| | |  börger systems | |
| | | SCALE: 1:16 | DRAWN BY: D. HUNT |
| | | DATE: 6-29-99 | CHECKED BY: NAME |
| 3-19-04 | | 10FT HP LPM | |
| DATE | REV. | DIM: INCH | DRAWING NUMBER |
| REVISION | | TOL: ±1/32 | P3064B |