



CASE SPECIFICATIONS:

REFRIGERATION

LOAD: 10,700 BTU/hr
 SUCTION TEMP: 20° F
 LIQUID LINE: 3/8IN ODS
 SUCTION LINE: 1/2IN ODS


ELECTRICAL 115V, 60HZ, 1PH.
 LIGHTS: 4.88A
 TOTAL: 4.88A
 MCA: 15.0A

ELECTRICAL 115V, 60HZ, 1PH.
 EVAP. FANS: 0.26A
 TOTAL: 0.26A
 MCA: 15.0A

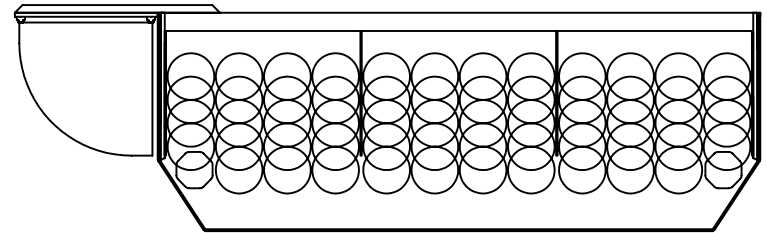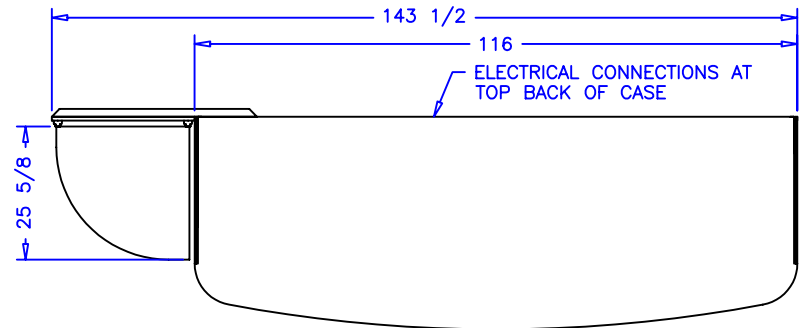

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE STATED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4X4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
5. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

		 börger systems	
		SCALE: 1:24	DRAWN BY: D. HUNT
6-27-05	DRH	DATE: 9-15-04	CHECKED BY:
1-26-05	DRH	12FT FLOWER BASKET W/SHLV	
10-20-04	DRH		
DATE	REV.	DIM: INCH	DRAWING NUMBER
REVISION		TOL: ±1/32	P4516B