



CASE SPECIFICATIONS:

REFRIGERATION
 LOAD: 10,700 BTU/hr
 SUCTION TEMP: 20° F
 LIQUID LINE: 3/8IN ODS
 SUCTION LINE: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.
 EVAP. FANS: .26A
 LIGHT BALLAST: 1.86A
 COND. PUMP: 1.0A (OPTIONAL)
 TOTAL: 3.12A
 MCA: 15.0A

ELECTRICAL 230VAC, 60HZ, 1PH.
 (2) EVAP. PAN: 7.2A (OPTIONAL)
 2HP COND. UNIT: 10.9A (OPTIONAL)

TOTAL: 25.3A
 MCA: 30.3A

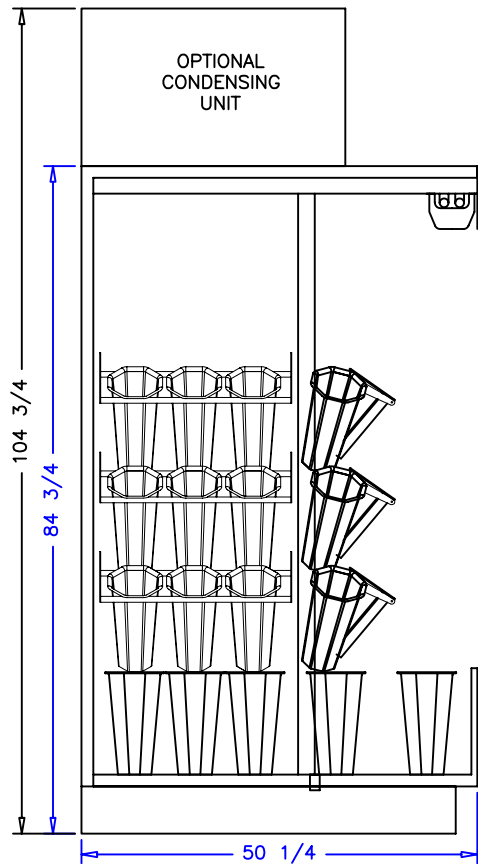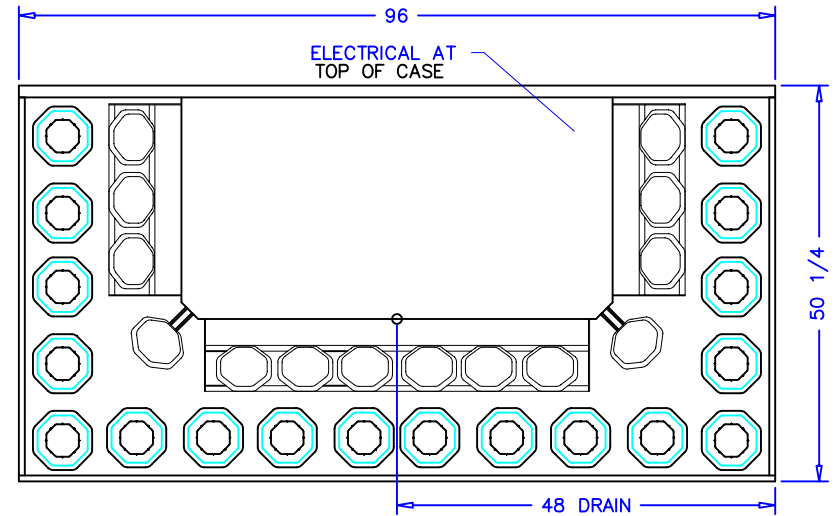

- 14 INCH PROCANA: 24
- 10 INCH FLORALWARE: 33
- 10 INCH VASES: 42
- ACTUAL FOOT PRINT: 33.5 SQ. FT.

ADDITIONAL SPECIFICATIONS:

REFRIGERATION

LOAD PER FOOT: 1006 BTU/hr
 (DOUBLE HEIGHT OF LPM)


ELECTRICAL POWER CONSUMPTION

EVAP FANS: 0.030Kw/hr
 LIGHTS: 0.214 Kw/hr
 OPTIONAL COND. UNIT: 2.246 Kw/hr

OPTIONAL HIGH LIFT PUMP INFORMATION:
 GPM: 3.0
 OUTPUT: 60 PSI
 HEAD: 125FT

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE STATED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELECTRICAL CONNECTION: 115V/230V, 4X4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: STRAINER BASKET W/TRAP TO 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

				börger systems	
		SCALE: 1:16			DRAWN BY: D. HUNT
1-25-05	DRH	DATE: 2-1-2002			CHECKED BY:
8-10-04	DRH	3D BOUQUET			
5-21-04	DRH				
DATE	REV.	DIM: INCH			DRAWING NUMBER
REVISION		TOL: ±1/32			P3903B