
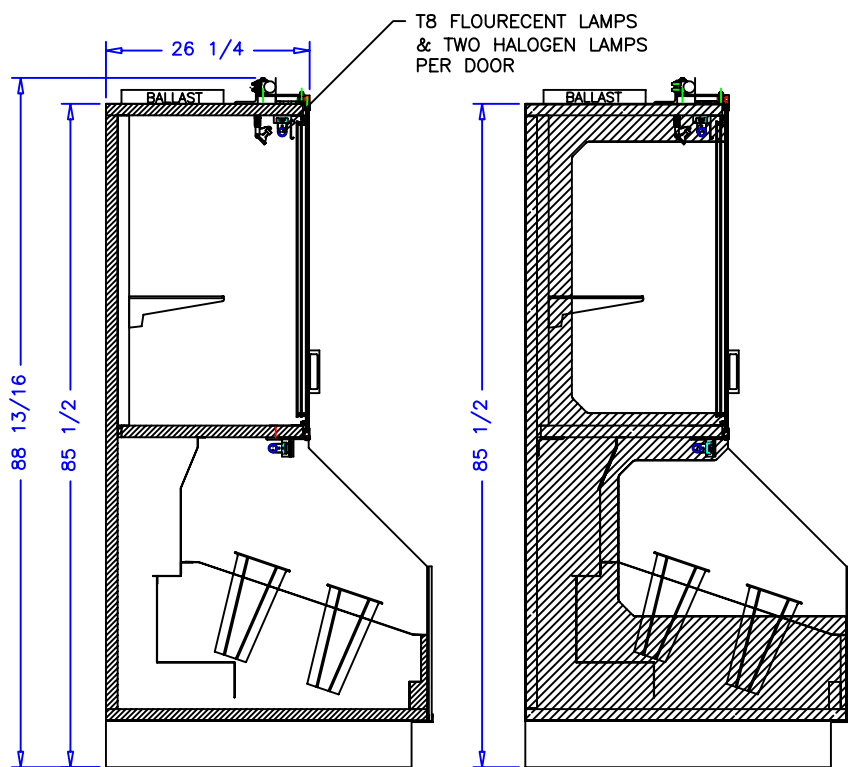
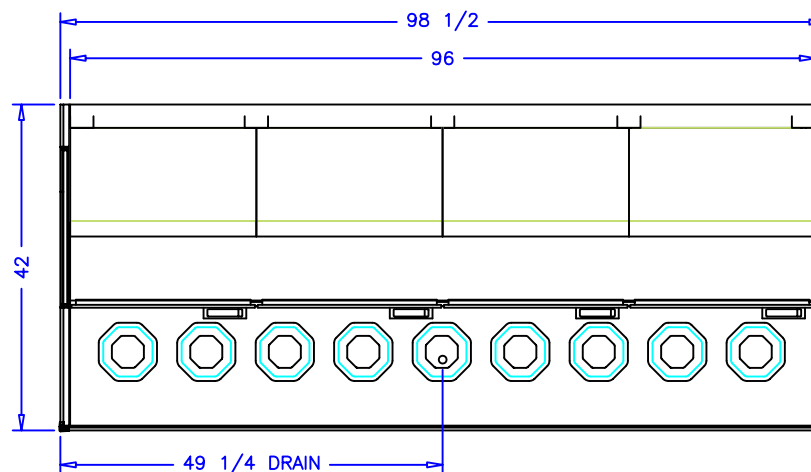


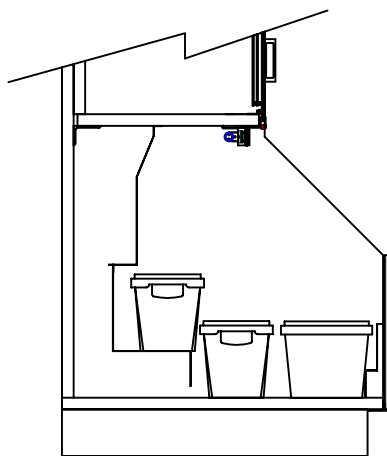

CASE SPECIFICATIONS (BOTTOM):

REFRIGERATION:
LOAD: 8,640 BTU/hr
SUCTION TEMP: 20°F
SUCTION LINE: 5/8IN ODS
LIQUID LINE: 3/8IN ODS

ELECTRICAL 115V, 60HZ, 1PH
EVAP. FANS: 0.26A
LIGHT BALLASTS: 0.74A
TOTAL: 1.00A

CASE SPECIFICATIONS (DOORS):

REFRIGERATION:
LOAD: 2,700 BTU/hr
SUCTION TEMP: 20°F
SUCTION LINE: 5/8IN ODS
LIQUID LINE: 3/8IN ODS

ELECTRICAL 115V, 60HZ, 1PH
EVAP. FANS: 1.40A
LIGHT BALLASTS: 0.74A
LIGHT TRANSFORMERS: 2.6A
TOTAL: 4.74A

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE STATED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4X4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 INCH NATIONAL PIPE STRAIGHT THREAD.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

		 börger systems	
	SCALE:	1:16	DRAWN BY: D. HUNT
	DATE:	7-21-00	CHECKED BY: NAME
8' DOORS ABOVE OPEN			
DATE	REV.	DM: INCH	DRAWING NUMBER
REVISION		TOL: ±1/32	P3503B