



CASE SPECIFICATIONS:

REFRIGERATION
 LOAD: 8,500 BTU/hr
 SUCTION TEMP: 20° F
 LIQUID LINE: 3/8IN ODS
 SUCTION LINE: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.
 LIGHT BALLAST: 2.94A
 TOTAL: 2.94A
 MCA: 15.0A


ELECTRICAL 115VAC, 60HZ, 1PH.
 EVAP. FANS: .26A
 COND. PUMP: 1.0A
 TOTAL: 1.26A
 MCA: 15.0A

ELECTRICAL 230VAC, 60HZ, 1PH.
 CONDENSING UNIT: 7.7A
 CONDENSATE PAN: 6.5A
 TOTAL: 14.2A
 MCA: 17.3A

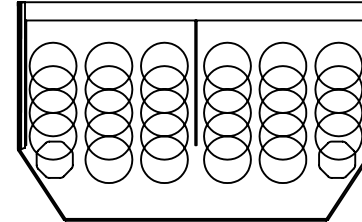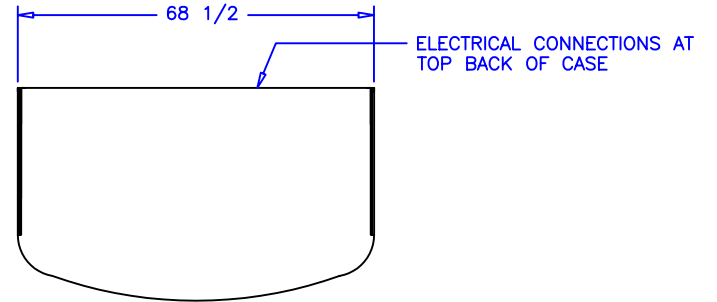

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE STATED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4X4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
5. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

		 börger systems	
		SCALE: 1:24	DRAWN BY: D. HUNT
		DATE: 2-15-06	CHECKED BY:
6FT FLORAL BASKET			
DATE	REV.	DIM: INCH	DRAWING NUMBER
REVISION		TOL: ±1/32	P4806B