


CASE SPECIFICATIONS:

REFRIGERATION
 LOAD: 6,600 BTU/hr
 SUCTION TEMP: 20° F
 LIQUID LINE: 3/8IN ODS
 SUCTION LINE: 1/2IN ODS


ELECTRICAL 115VAC, 60HZ, 1PH.
 EVAP. FANS: .26A
 LIGHTS: 1.47
 3/4HP COND. UNIT: 10.2A
 TOTAL: 11.94A

6FT CORD WITH NEMA 5-15P
 EQUIPPED WITH CASTERS FOR PORTABILITY
 PASSIVE CONDENSATE EVAP SYSTEM INCLUDED

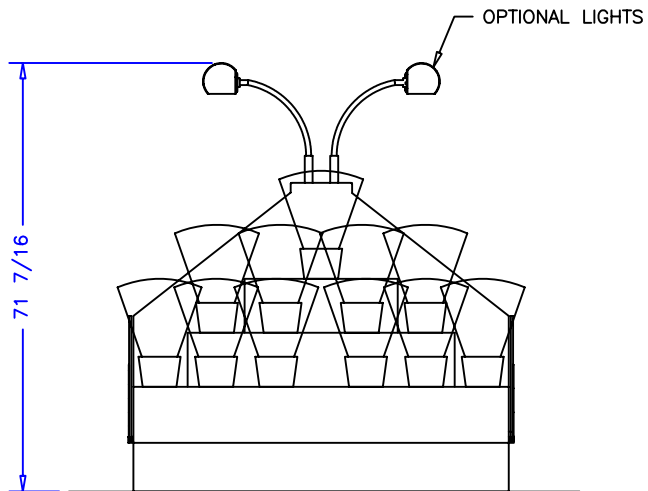

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):		DATE:		 börger systems	
SIGNATURE:					
				DATE: 3-24-04	CHECKED BY:
10-13-04	DRH	6FT LPM FIELD OF FLOWERS			DRAWING NUMBER
DATE	REV.	DWG:	INCH	P4406A	
REVISION		TOL:			