


CASE SPECIFICATIONS:


REFRIGERATION
 LOAD: 15,120 BTU/hr
 SUCTION TEMP: 20° F
 LIQUID LINE: 3/8IN ODS
 SUCTION LINE: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.
 EVAP. FANS: .78A
 TOTAL: .78A
 MCA: 15.0A

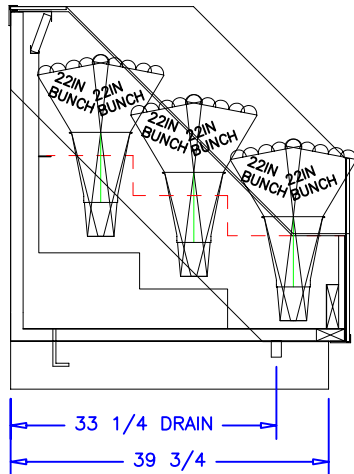

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

| | | | | |
|------------------------|----------|---|--------------------------|------------------|
| AUTHORIZATION (PRINT): | DATE: |  börger systems | | DRAWN BY: D HUNT |
| SIGNATURE: | | | | SCALE: 1:24 |
| | | DATE: 12-23-04 | 12FT HP LPM | |
| | DATE | REV. | DWG: | INCH |
| | REVISION | TOL: | DRAWING NUMBER P2986A | |