


CASE SPECIFICATIONS:


REFRIGERATION  
 LOAD: 12,500 BTU/hr  
 SUCTION TEMP: 20° F  
 LIQUID LINE: 3/8IN ODS  
 SUCTION LINE: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.  
 EVAP. FANS: .52A  
 LIGHT BALLAST: 1.88A  
 FRESH WATER SYSTEM: 5.0A  
 TOTAL: 7.4A  
 MCA: 15.0A

ELECTRICAL 208/230VAC, 60HZ, 1PH.  
 1 1/2 HP COND. UNIT: 10.9A  
 TOTAL: 10.9A  
 MCA: 16.5A

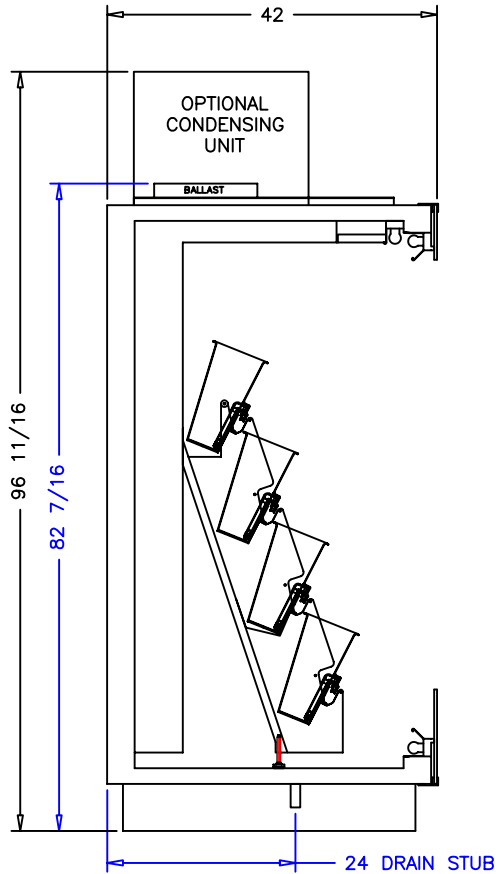


FLOOR DRAIN MUST BE PROVIDED FOR THIS CASE

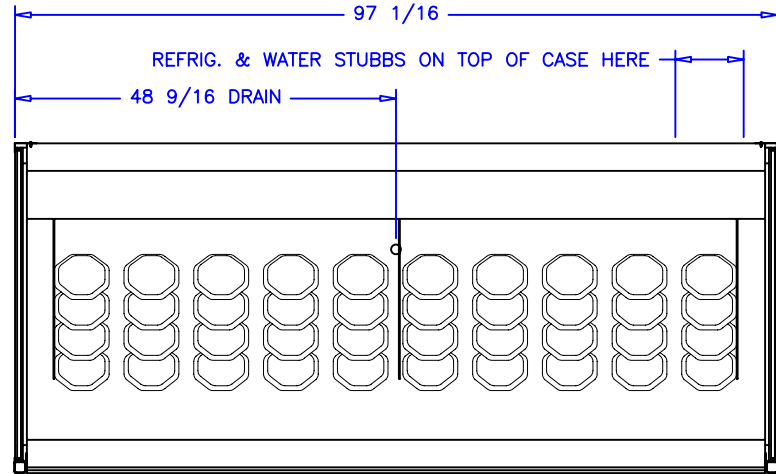

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 INCH NATIONAL PIPE STRAIGHT THREAD.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

		 <b>börger systems</b>	
SCALE:	1:16	DRAWN BY: D HUNT	
DATE:	5-28-02	CHECKED BY:	
8FT OPEN FWE			
DATE	REV.	DIM:	INCH
REVISION		TOL:	
			DRAWING NUMBER P4146B