


CASE SPECIFICATIONS:


REFRIGERATION
 LOAD: 9,640 BTU/hr
 SUCTION TEMP: 20° F
 LIQUID LINE: 3/8IN ODS
 SUCTION LINE: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.
 EVAP. FANS: .39A
 LIGHT BALLAST: .94A
 FRESH WATER SYSTEM: 5.0A
 TOTAL: 6.33A
 MCA: 15.0A

ELECTRICAL 208/230VAC, 60HZ, 1PH.
 1 1/4HP COND. UNIT: 9.6A
 TOTAL: 9.6A
 MCA: 14.9A

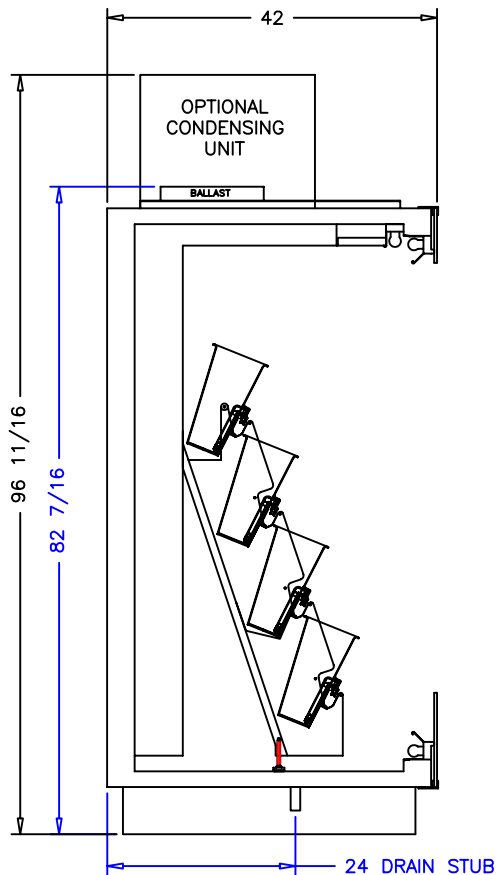


FLOOR DRAIN MUST BE PROVIDED FOR THIS CASE

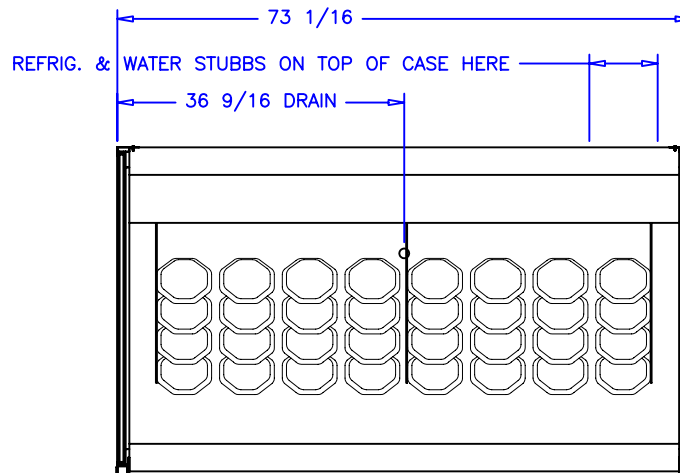

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 INCH NATIONAL PIPE STRAIGHT THREAD.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

		 börger systems	
SCALE:	1:16	DRAWN BY: D HUNT	
DATE:	5-28-02	CHECKED BY:	
6FT OPEN FWE			
DATE	REV.	DIM:	INCH
REVISION		TOL:	
			DRAWING NUMBER P4147B