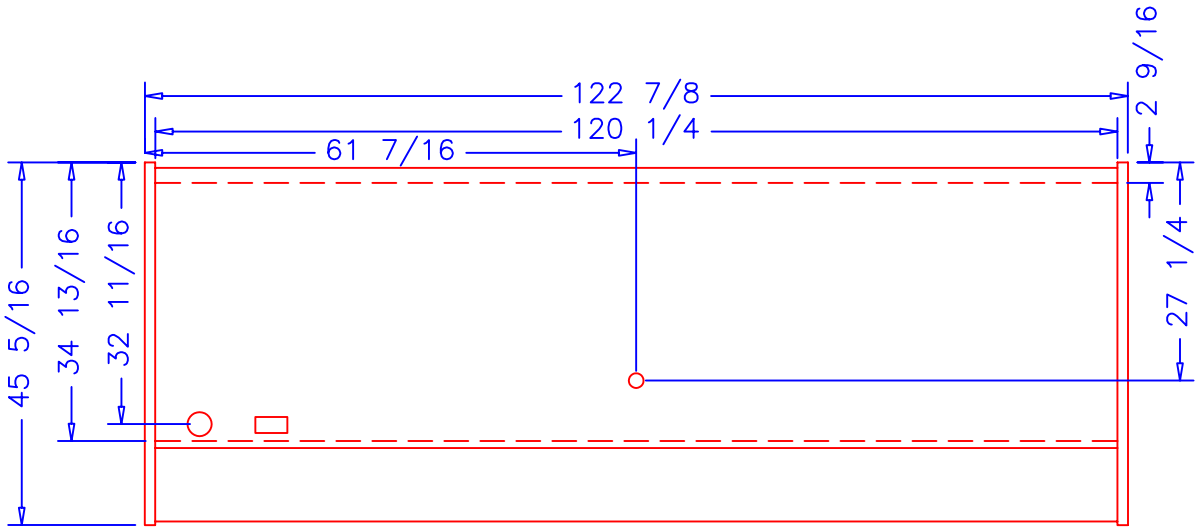

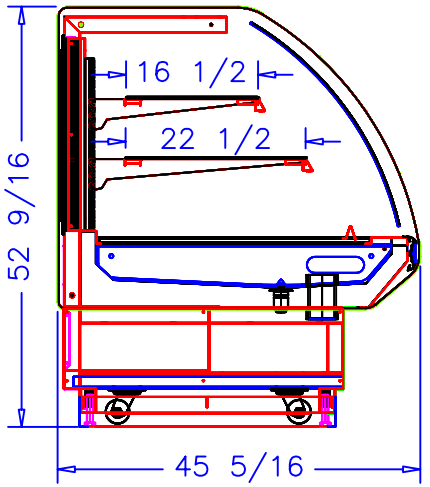

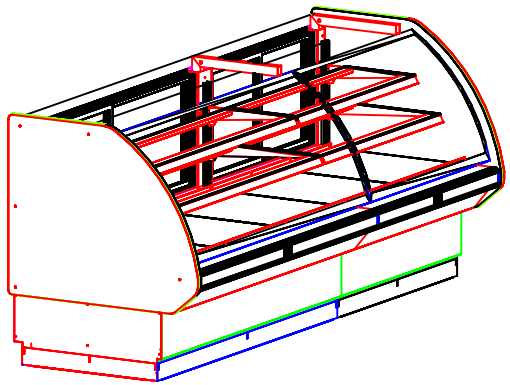

DLI100 10' DRY BAKERY
SPECIFICATIONS:

ELECTRICAL 115VAC, 60HZ, 1PH.
LIGHT BALLAST: .93A
TOTAL: 1.86A

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):	DATE:			börgen systems	
SIGNATURE:				SCALE: 1:x	DRAWN BY: NAME
				DATE: MM–DD–04	CHECKED BY:
				10' BAKERY DRY BG10BD	
		DATE	REV.	DIM: INCH	DRAWING NUMBER P4278A
		REVISION		TOL:	