


ELECTRICAL SOURCE CONNECTION
FROM CEILING OR FLOOR

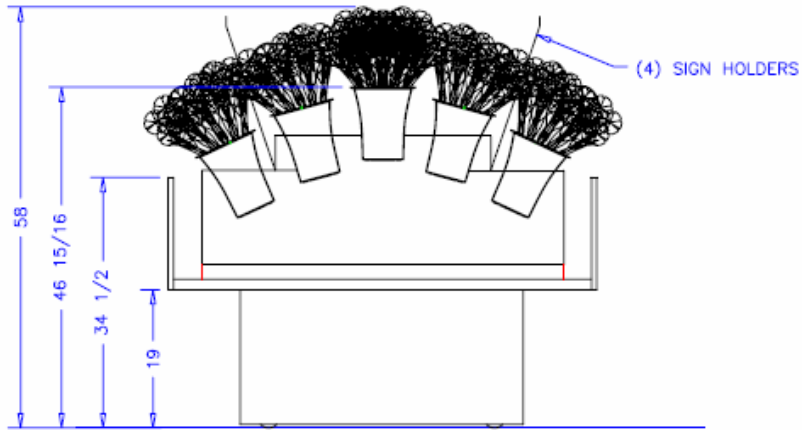

CASE SPECIFICATIONS:

REFRIGERATION
LOAD: 8,580 BTU/hr
SUCTION TEMP: 20° F
LIQUID LINE: 3/8IN ODS
SUCTION LINE: 7/8IN ODS

ELECTRICAL 208/230V, 60HZ, 1PH.
EVAP FANS: .26A
EVAP. PAN: 14.4A
1 1/4HP COND. UNIT: 9.6A
TOTAL: 24.26A
MCA: 29.6A
MAX. CIRCUIT BREAKER: 40.0A


DISCHARGE AIR TEMPERATURES:
CUT-IN 38°F
CUT-OUT 35°F

DEFROST:
6 TIMES PER DAY
DURATION 20 MINUTES

TD DISCHARGE TO PRODUCT:
3-8°F

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):	DATE:	 börgeren systems		SCALE: 1:24	DRAWN BY: D. HUNT
SIGNATURE:				DATE: 9-24-07	CHECKED BY:
		12-5-07 DRH	5FT FLOWER MOUND		
		10-2-07 DRH			
		DATE REV ENG INCH	DRAWING NUMBER		
		REVISION TO:			P5209A