


CASE SPECIFICATIONS:

REFRIGERATION

LOAD: 6,250 BTU/hr
 SUCTION TEMP: 20° F
 LIQUID LINE: 3/8IN ODS
 SUCTION LINE: 7/8IN ODS


ELECTRICAL 208/230V, 60HZ, 1PH.

EVAP FANS: .26A
 EVAP. PAN: 14.4A
 1HP COND. UNIT: 7.7A
 TOTAL: 22.1A
 MCA: 25.2A

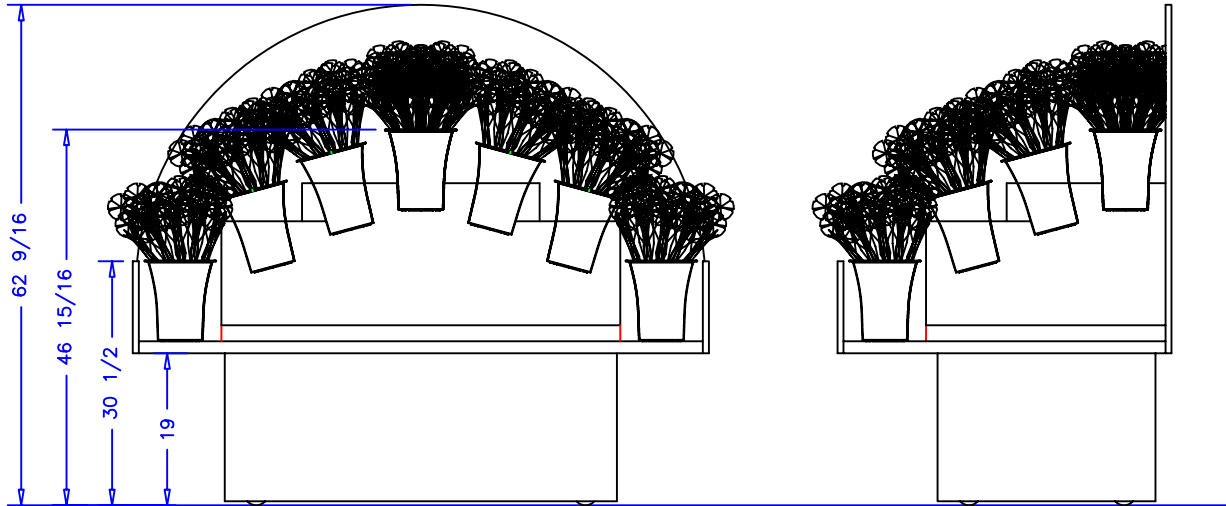

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

| | | | | | |
|------------------------|------|-------|------|---|-------------|
| AUTHORIZATION (PRINT): | | DATE: | |  börger systems | |
| SIGNATURE: | | | | | |
| | | | | DATE: 10-31-07 | CHECKED BY: |
| | | | | 3/5 6FT FLOWER MOUND | |
| DATE | REV. | DIM: | INCH | DRAWING NUMBER | |
| REVISION | | TOL: | | P5210A | |