

CASE SPECIFICATIONS:



REFRIGERATION

(2) END CAPS: 5,620 BTU/hr (ea)  
 (2) STRAIGHT SECTIONS: 19,800 BTU/hr (ea)  
 TOTAL LOAD: 50,840 BTU/hr  
 SUCTION TEMP: 14° F  
 LIQUID LINE: 3/8IN ODS  
 SUCTION LINE: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.

EVAP. FANS: 5.04A  
 LIGHT BALLAST: 8.94A  
 TOTAL: 13.98A  
 MCA: 20.0A


(E) = ELECTRICAL CONNECTION AND THERMOSTATS BEHIND KICK PLATE  
 (R) = REFRIGERATION STUB OUT

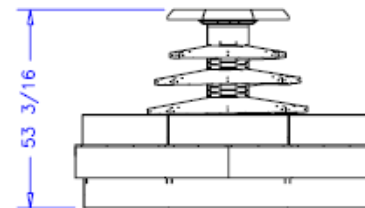

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.



AUTHORIZATION (PRINT):		DATE:		 <b>börger systems</b>		SCALE: 1:48	DRAWN BY: D HUNT
SIGNATURE:						DATE: 4-17-08	CHECKED BY:
				7 x 19 MDI (4PC)			
				DATE	REV	DR	INCH
				REVISION	TOL:		DRAWING NUMBER: P5397A