



CASE SPECIFICATIONS:

REFRIGERATION  
 (2) END CAPS: 5,620 BTU/hr (ea)  
 (2) STRAIGHT SECTIONS: 13,240 BTU/hr (ea)  
 TOTAL LOAD: 37,720 BTU/hr  
 SUCTION TEMP: 14° F  
 LIQUID LINE: 3/8IN ODS  
 SUCTION LINE: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.  
 EVAP. FANS: 4.32A  
 LIGHT BALLAST: 6.64A  
 TOTAL: 10.96A  
 MCA: 20.0A


(E) = ELECTRICAL CONNECTION AND THERMOSTATS BEHIND KICK PLATE  
 (R) = REFRIGERATION STUB OUT

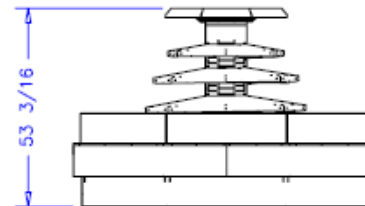

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.



AUTHORIZATION (PRINT):	DATE:	 <b>börger systems</b>		SCALE: 1:48	DRAWN BY: A. BESIC
SIGNATURE:				DATE: 8-18-08	CHECKED BY:
		8-27-08 DRH	7 x 15 MDI (4PC)		
		8-26-08 DRH			
DATE	REV	DN	INCH	DRAWING NUMBER	
REVISION	TOL:			P5411A	