
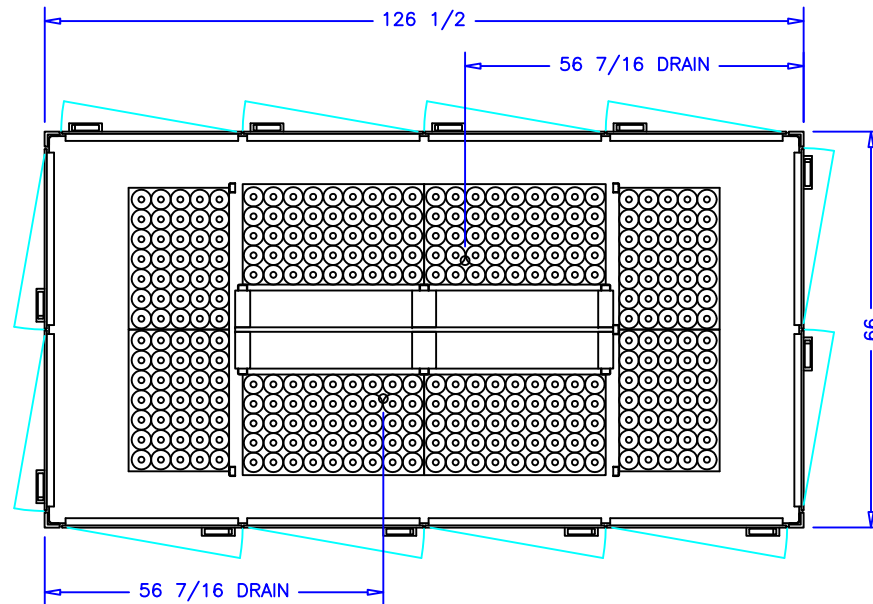


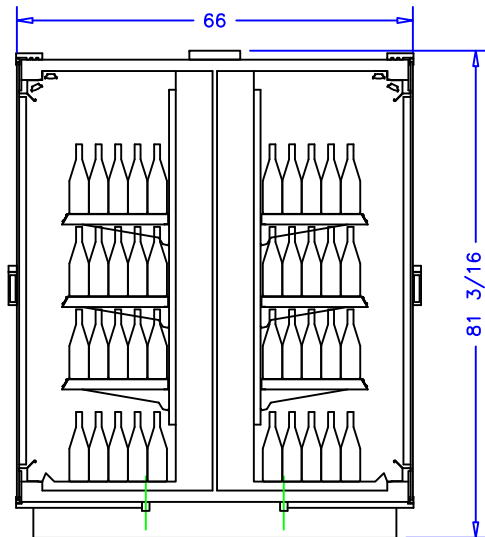

CASE SPECIFICATIONS:

REFRIGERATION

LOAD: 9,500 BTU/hr
COIL TEMP: 30° F
LIQUID STUB: 3/8IN ODS
SUCTION STUB: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.

EVAP. FANS: 1.2A
LED LIGHTS: 10.8A
TOTAL: 12.0A
MCA: 20.0A

MIDDLE SIDE DOORS:
180 BOTTLES PER DOOR

END DOORS:
140 BOTTLES PER DOOR

CASE TOTAL: 1,280 BOTTLES

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.



AUTHORIZATION (PRINT):		DATE:		 börger systems	
SIGNATURE:					
				SCALE: 1:32	DRAWN BY: D HUNT
				DATE: 4-23-12	CHECKED BY:
				12DR WINE ISLAND	
DATE	REV.	DIM:	INCH		
REVISION	TOL:				
				DRAWING NUMBER P6219	