
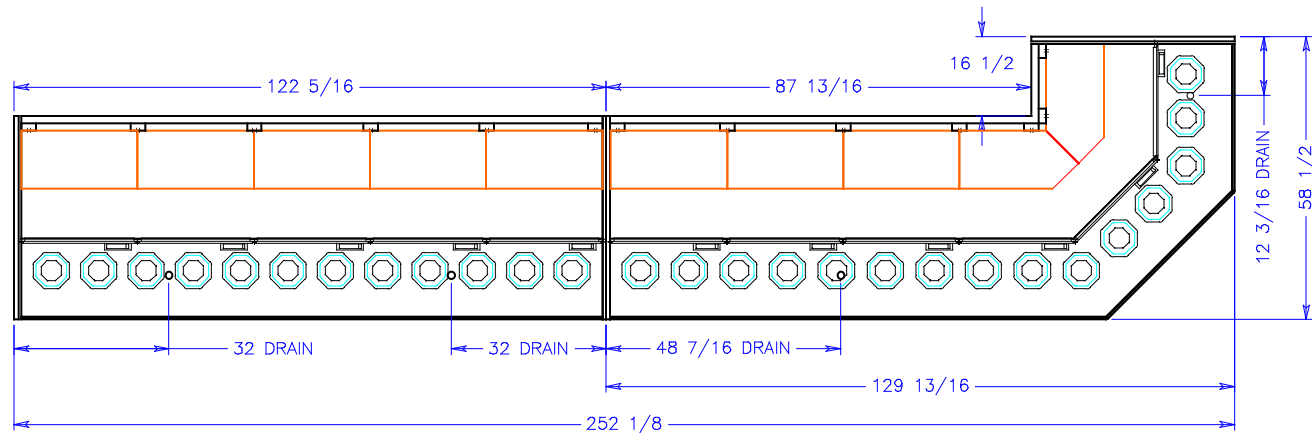
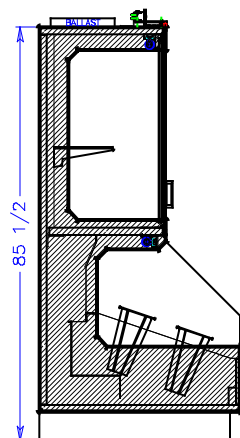
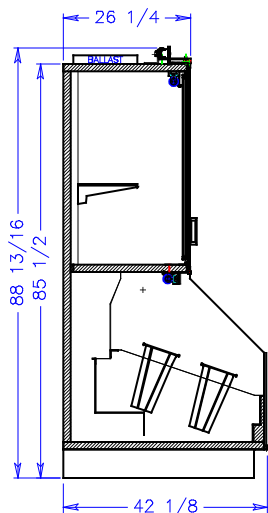




CASE SPECIFICATIONS:

REFRIGERATION

LOAD: 10,800 BTU/hr
SUCTION TEMP: 20° F
LIQUID LINE: 3/8IN ODS
SUCTION LINE: 5/8IN ODS

ELECTRICAL 115V, 60HZ, 1PH.
EVAP. FANS: 1.44A
LIGHT BALLASTS: 1.15A
TOTAL: 2.59A

CASE SPECIFICATIONS (DOORS):

REFRIGERATION

LOAD: 3,375 BTU/hr
SUCTION TEMP: 20° F
LIQUID LINE: 3/8IN ODS
SUCTION LINE: 5/8IN ODS

ELECTRICAL 115V, 60HZ, 1PH.
EVAP. FANS: .72A
LIGHT BALLASTS: 1.15A
TOTAL: 1.87A

WRAP CASE SPECIFICATIONS:

REFRIGERATION

LOAD: 12,960 BTU/hr
SUCTION TEMP: 20° F
LIQUID LINE: 3/8IN ODS
SUCTION LINE: 5/8IN ODS

ELECTRICAL 115V, 60HZ, 1PH.
EVAP. FANS: 1.44A
LIGHT BALLASTS: 1.15A
TOTAL: 2.59A

WRAP CASE SPECIFICATIONS (DOORS):

REFRIGERATION

LOAD: 4050 BTU/hr
SUCTION TEMP: 20° F
LIQUID LINE: 3/8IN ODS
SUCTION LINE: 5/8IN ODS

ELECTRICAL 115V, 60HZ, 1PH.
EVAP. FANS: .72A
LIGHT BALLASTS: 1.15A
TOTAL: 1.87A

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE STATED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4X4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 INCH NATIONAL PIPE STRAIGHT THREAD.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

		börgen systems		
		SCALE: 1:24		DRAWN BY: D. HUNT
		DATE: 6-4-2001		CHECKED BY:
		20FT DR/OPN HUTCH WRAP		
DATE:	REV.	DIM: INCHES		DRAWING NUMBER
REVISION		TOL: ±1/4		P3780B