


SHELF SPECIFICATIONS:

(8) CONVERTABLE SHELVES FOR ARRANGEMENTS

(35) 10 INCH FLORALWARE VASES

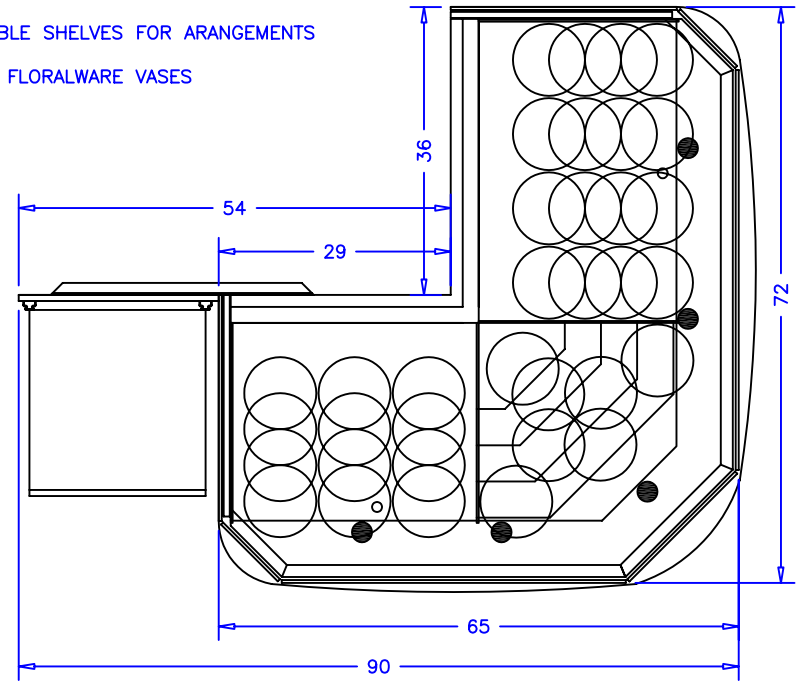

CASE SPECIFICATIONS:


REFRIGERATION

LOAD: 14,030 BTU/hr
 SUCTION TEMP: 20° F
 LIQUID LINE: 3/8IN ODS
 SUCTION LINE: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.
 EVAP. FANS: .39A
 LIGHT BALLAST: 1.48A
 FLOOD LIGHTS: 2.2A
 TOTAL: 4.07A
 MCA: 15.0A

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):	DATE:	 börger systems		SCALE: 1:24	DRAWN BY: D HUNT
SIGNATURE:				DATE: 1-14-05	CHECKED BY:
		1-25-05	DRH	2 x 3 WRAP LEFT AUX SHELVES	
		DATE	REV.	DWG:	INCH
		REVISION	TOL:	DRAWING NUMBER	
					P4613A