

CASE SPECIFICATIONS: TOP AREA: 148.5 SQR FEET

REFRIGERATION:

LOAD: 22,000 BTU/hr
 COIL: CTA 58-230.
 SUCTION TEMP: 20° F
 LIQUID LINE: 3/8IN ODS
 SUCTION LINE: 7/8IN ODS

ELECTRICAL 115V, 60HZ, 1PH.


EVAP. FANS: 5.5A
 MERCH. BALLASTS: 2.8A
 TROFFER LIGHT FIX: 5.64
 CONDENSATE PUMP: 1.0
 TOTAL: 14.94A

WALKIN COOLER INFORMATION:

LIGHT SWITCH ADJACENT SERVICE DOOR.
 THERMOMETER ABOVE LIGHT SWITCH.
 VENT ABOVE THE SERVICE DOOR.


DISPLAY IN FORMATION:

TEMPERED GLASS SHELVES ARE HEIGHT ADJUSTABLE.
 BLACK BACK GLASS BETWEEN SHELF STANDARDS.

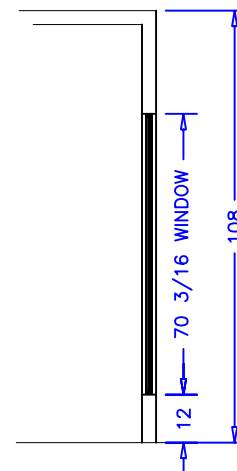

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):		DATE:		 börger systems	
SIGNATURE:					
				SCALE: 1:48	DRAWN BY: J. MAUK
				DATE: 12-1-93	CHECKED BY:
		5DR WALK THRU			
DATE	REV.	DIM:	INCH	DRAWING NUMBER	
REVISION	TOL:			P1646A	