


CASE SPECIFICATIONS:


REFRIGERATION: 5,175 BTU/hr  
 SUCTION TEMP: 20° F  
 LIQUID LINE: 3/8IN ODS  
 SUCTION LINE: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.  
 EVAP. FANS: .26A  
 LIGHT BALLAST: 2.22A  
 CAROUSEL: 1.5A  
 CASE TOTAL: 3.98A  
 MCA: 15.0A

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115v/230v, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

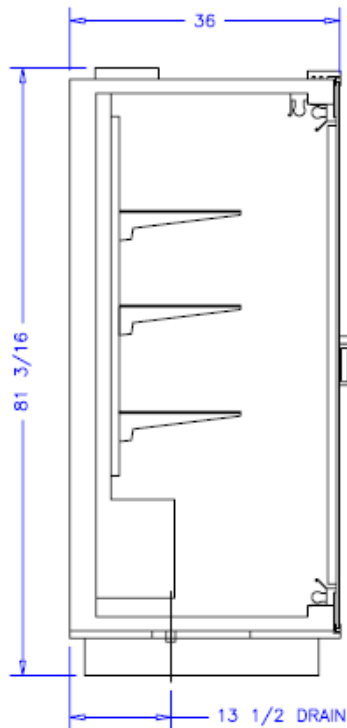

AUTHORIZATION (PRINT):	DATE:	 <b>börger systems</b>		SCALE: 1:24	DRAWN BY: D. HUNT
SIGNATURE:				DATE: 1-21-99	CHECKED BY:
		4DR INSIDE CORNER w/CAROUSEL			DRAWING NUMBER:
DATE	REV	DIM	INCH	P2905A	
REVISION		TOL:			