
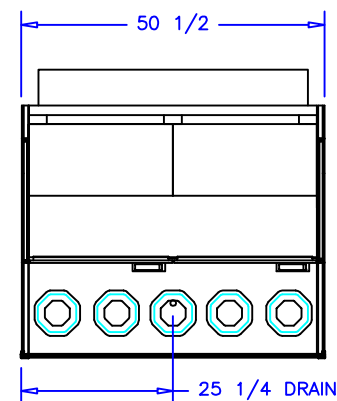
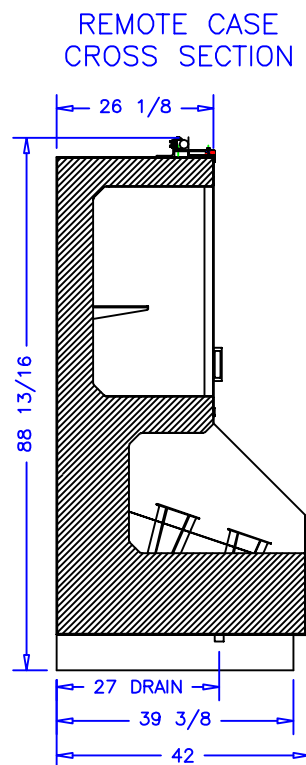


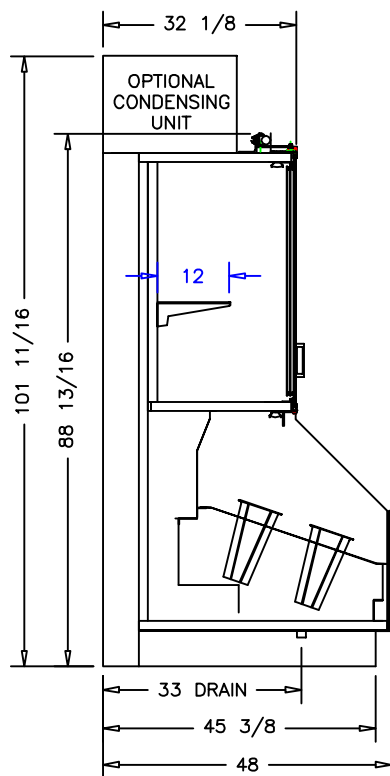

CASE SPECIFICATIONS:

REFRIGERATION:

LOAD: 6,400 BTU/hr
 COIL TEMP: 25°F
 SUCTION STUB: 5/8IN ODS
 LIQUID STUB: 3/8IN ODS

ELECTRICAL 115V, 60HZ, 1PH

EVAP. FANS: .48A
 LIGHTS: 1.2A
 COND. PUMP: 1.0A
 TOTAL: 2.68A
 MCA: 15.0A

ELECTRICAL 208/230V, 60HZ, 1PH

EVAP. PAN: 7.2A
 3/4HP COND. UNIT: 6.1A
 TOTAL: 13.3A
 MCA: 16.0A



NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):		DATE:									
SIGNATURE:											
		2-18-15		DRH		SCALE: 1:32				DRAWN BY: D HUNT	
		11-15-07		DRH		DATE: 9-1-00				CHECKED BY:	
		6-21-07		DRH							
		4-22-05		DRH							
		DATE		REV		DIM		INCH			
		REVISION		TOL						DRAWING NUMBER	
										P3560	

börger systems

2DR, 4FT HUTCH