
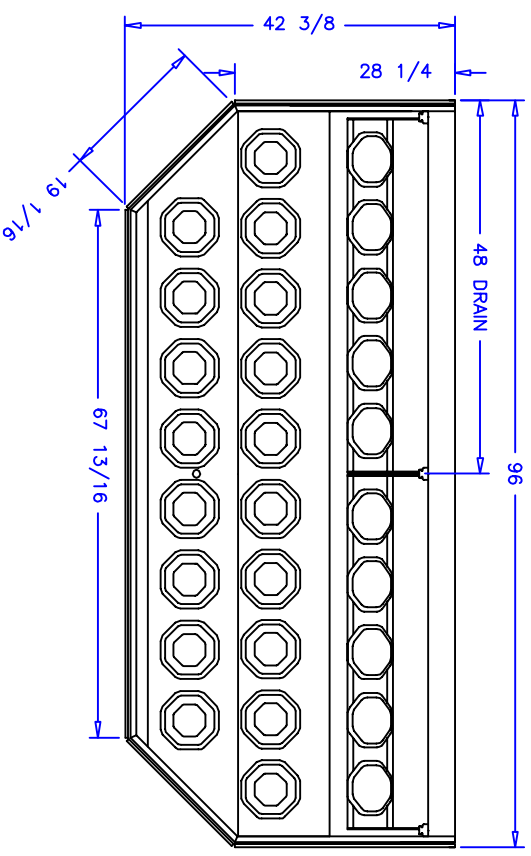
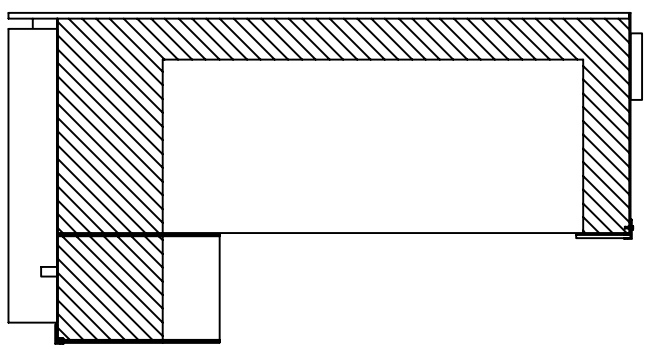



CASE SPECIFICATIONS:

REFRIGERATION
 LOAD: 10,700 BTU/hr
 SUCTION TEMP: 25° F
 LIQUID LINE: 3/8IN ODS
 SUCTION LINE: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.
 EVAP. FANS: .60A
 LIGHTS: 2.4A
 TOTAL: 3.0A
 MCA: 15.0A

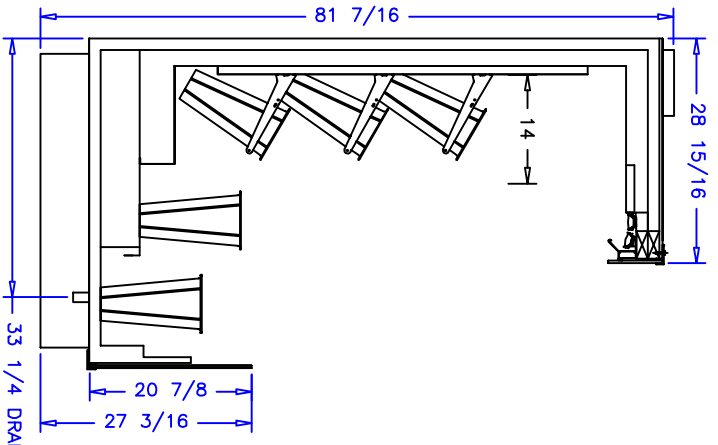

- NOTES:
1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
 2. ELEC. CONNECTION: 115V/230V, 4X4 SUPPLY BOX AS NEEDED.
 3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
 4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLER), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
 5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
 6. DRAIN: 1 INCH NATIONAL PIPE STRAIGHT THREAD.
 7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

		SCALE:	1:16	DRAWN BY:	D HUNT
		DATE:	6-20-03	CHECKED BY:	
5-27-15	DRH	8FT RFO			
5-4-12	DRH				
6-17-04	DRH				
DATE	REV	DATE	REV	DRAWING NUMBER	P4159
REVISION	TOL.	INCH			