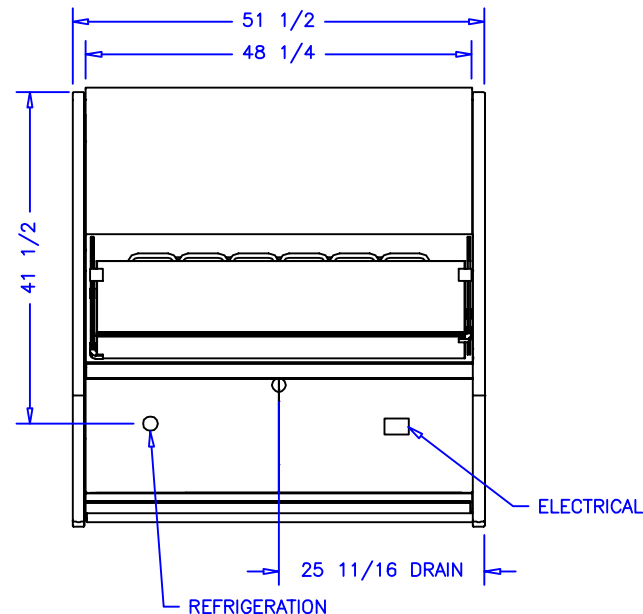
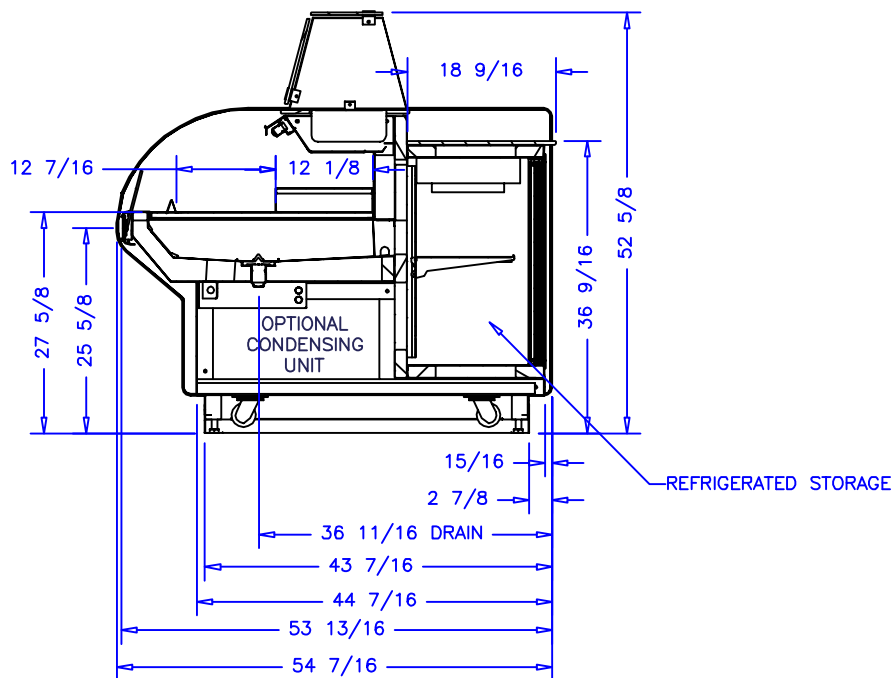


CASE SPECIFICATIONS:

REFRIGERATION:

CASE LOAD: 3,780 BTU/hr
 COIL TEMP: 22° F
 LIQUID STUB: 3/8IN ODS
 SUCTION STUB: 5/8IN ODS

AIR DISCHARGE:

28° F @ 300 FPM

INITIAL DEFROST SETTING

6 PER DAY @ 40 MIN. EACH

ELECTRICAL 115VAC, 60HZ, 1PH.

EVAP. FANS: .72A

LIGHT BALLAST: .74A

EVAP PAN: 5.2A

1/2HP COND. UNIT: 9.2A

TOTAL: 15.86A

MCA: 20.0A

PANS: (6) 1/4 SIZE W/LIDS INCLUDED
 STANDARD



NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):		DATE:		 börger systems	
SIGNATURE:					
				SCALE: 1:24	DRAWN BY: DWT
				DATE: 3-10-05	CHECKED BY:
				4 FOOD PREP HIGH BG4PH	
		1-10-06	DRH		
		DATE	REV.	DWG.	INCH
		REVISION	TOL:		
				DRAWING NUMBER P4255	