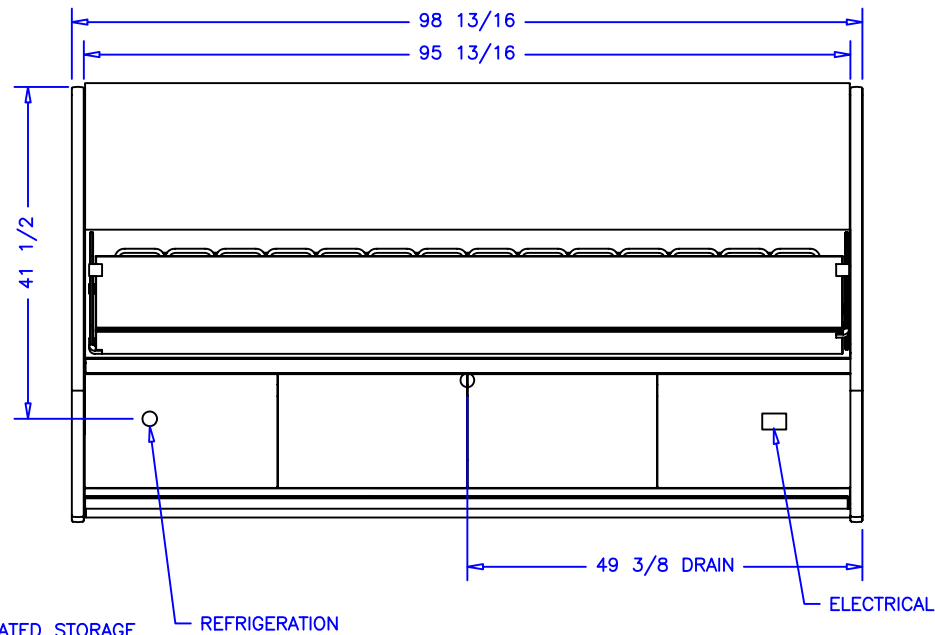
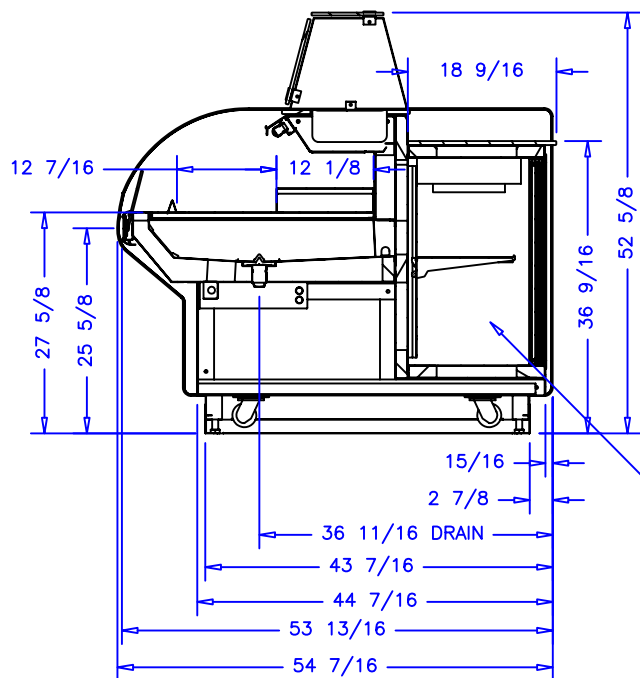


CASE SPECIFICATIONS:

REFRIGERATION:

CASE LOAD: 7,560 BTU/hr
COIL TEMP: 22° F
LIQUID STUB: 3/8IN ODS
SUCTION STUB: 5/8IN ODS

AIR DISCHARGE:

28° F @ 300 FPM

INITIAL DEFROST SETTING

6 PER DAY @ 40 MIN. EACH

ELECTRICAL 115VAC, 60HZ, 1PH.

EVAP. FANS: .72A
LIGHT BALLAST: 1.48A
TOTAL: 2.20A
MCA: 15.0A

ADDITIONAL CONNECTIONS FOR:

LIQUID LINE SOLENOID VALVE
DISCHARGE AIR PROBE
REAR FAN CONTROL RELAY

PANS: (14) 1/4 SIZE W/LIDS INCLUDED
STANDARD

WELL SIZE: (2) 9 9/16" x 43 3/4"



NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):		DATE:									
SIGNATURE:		6-19-09		DRH		SCALE: 1:24		DL100		DRAWN BY: DWT	
		3-20-06		DRH		DATE: 10-21-03				CHECKED BY:	
		1-10-06		DRH							
		2-8-05		DWT							
		DATE		REV.		DIM.		INCH			
		REVISION		TOL:						DRAWING NUMBER	
										P4256	



börger systems

8 FOOD PREP HIGH

BG8PH