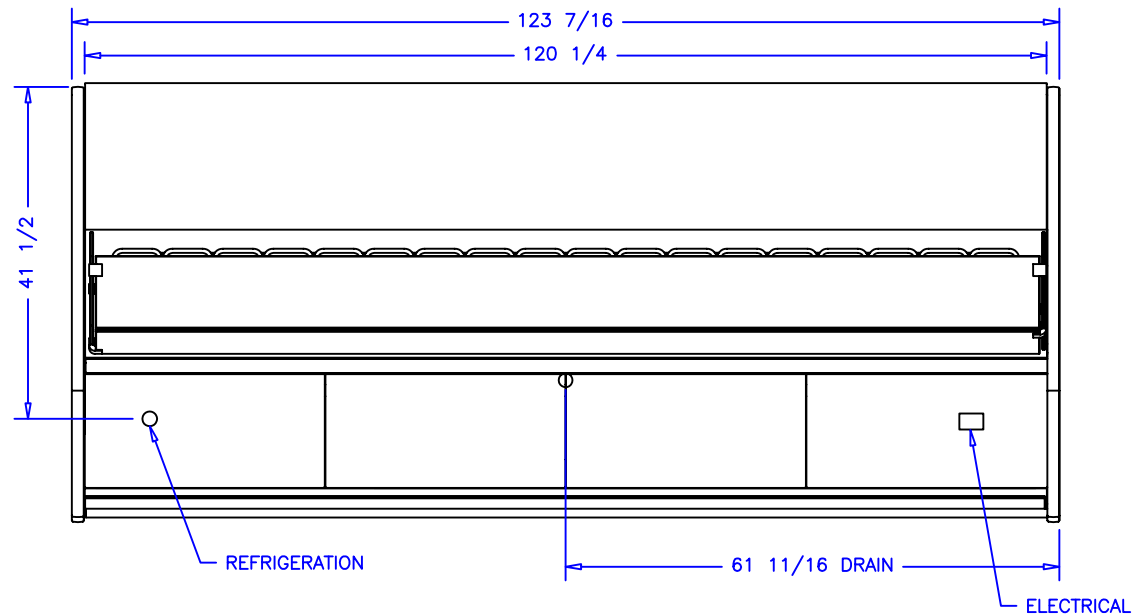
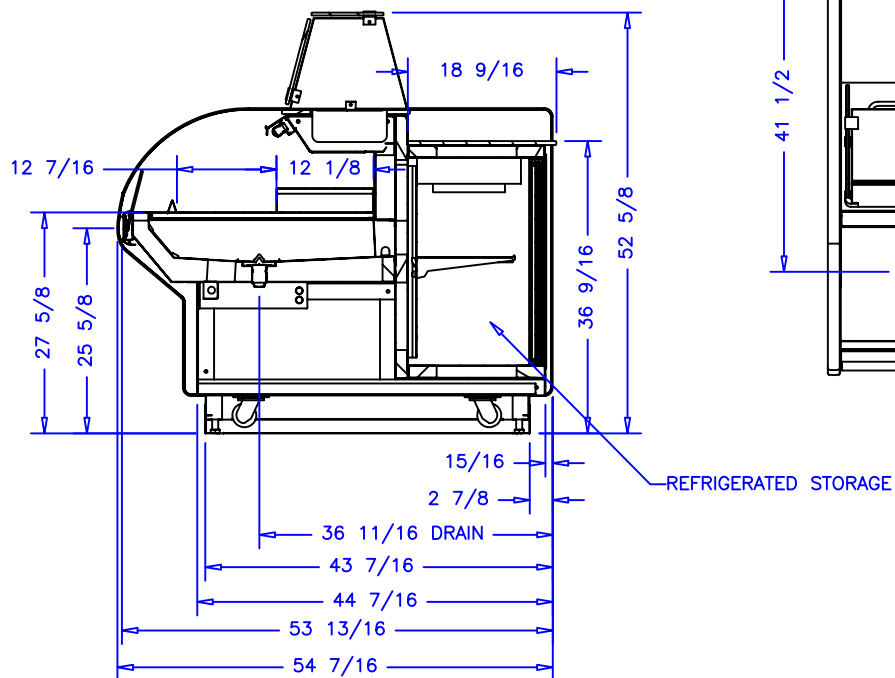


CASE SPECIFICATIONS:

REFRIGERATION:

CASE LOAD: 9,450 BTU/hr
COIL TEMP: 22° F
LIQUID STUB: 3/8IN ODS
SUCTION STUB: 5/8IN ODS

AIR DISCHARGE:

28° F @ 300 FPM

INITIAL DEFROST SETTING

6 PER DAY @ 40 MIN. EACH

ELECTRICAL 115VAC, 60HZ, 1PH.

EVAP. FANS: .90A
LIGHT BALLAST: 1.48A
TOTAL: 2.38A
MCA: 15.0A

ADDITIONAL CONNECTIONS FOR:

LIQUID LINE SOLENOID VALVE
DISCHARGE AIR PROBE
REAR FAN CONTROL RELAY

PANS: (18) 1/4 SIZE W/LIDS INCLUDED
STANDARD



NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):		DATE:		 börger systems	
SIGNATURE:					
		SCALE: 1:24	DL100		DRAWN BY: DWT
		DATE: 10-21-03			CHECKED BY:
		10 FOOD PREP HIGH BG10PH			
DATE	REV.	DM:	INCH	DRAWING NUMBER	
REVISION	TOL:			P4257	