


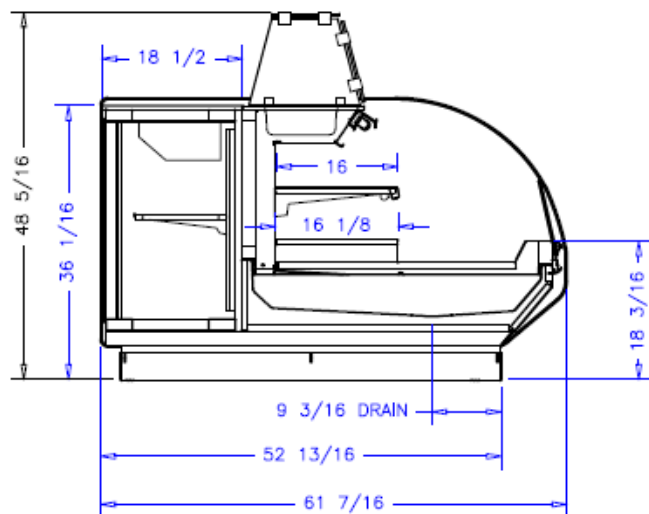

PANS: (10) 1/4 SIZE W/LIDS INCLUDED
STANDARD


CASE SPECIFICATIONS:

REFRIGERATION

LOAD: 6,000 BTU/hr
COIL TEMP: 22° F
LIQUID STUB: 3/8IN ODS
SUCTION STUB: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.
EVAP. FANS: 1.5A
LIGHT BALLAST: .65A
TOTAL: 2.15A
MCA: 15.0A

INITIAL DEFROST SETTING
6 PER DAY @ 40 MIN. EACH

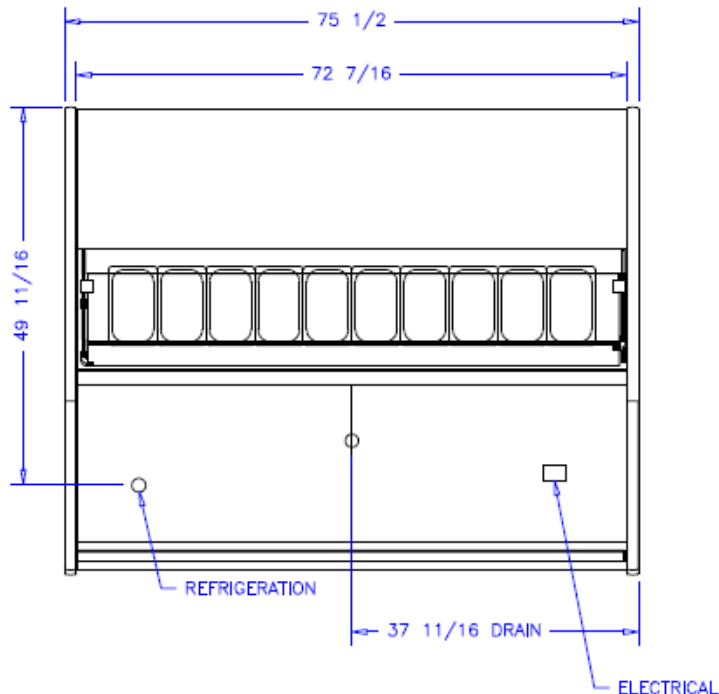

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):

DATE:

SIGNATURE:

		SCALE: 1:24		DRAWN BY: D HUNT
		DATE: 8-25-04	CHECKED BY:	
10-23-12 SEH		6FT PREP LOW BG6PL		
9-7-12 DRH				
12-16-09 DRH				
DATE	REV	REV	INCH	DRAWING NUMBER
REVISION	TOL			P4260