
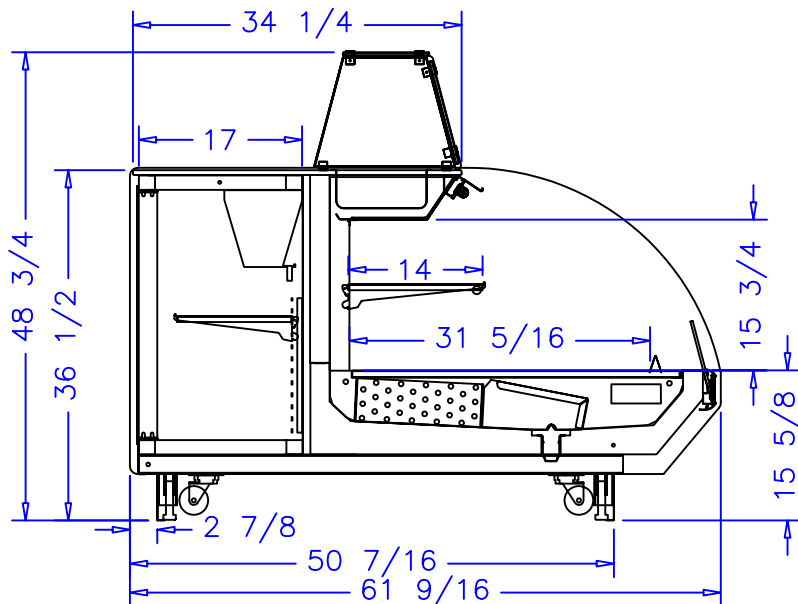


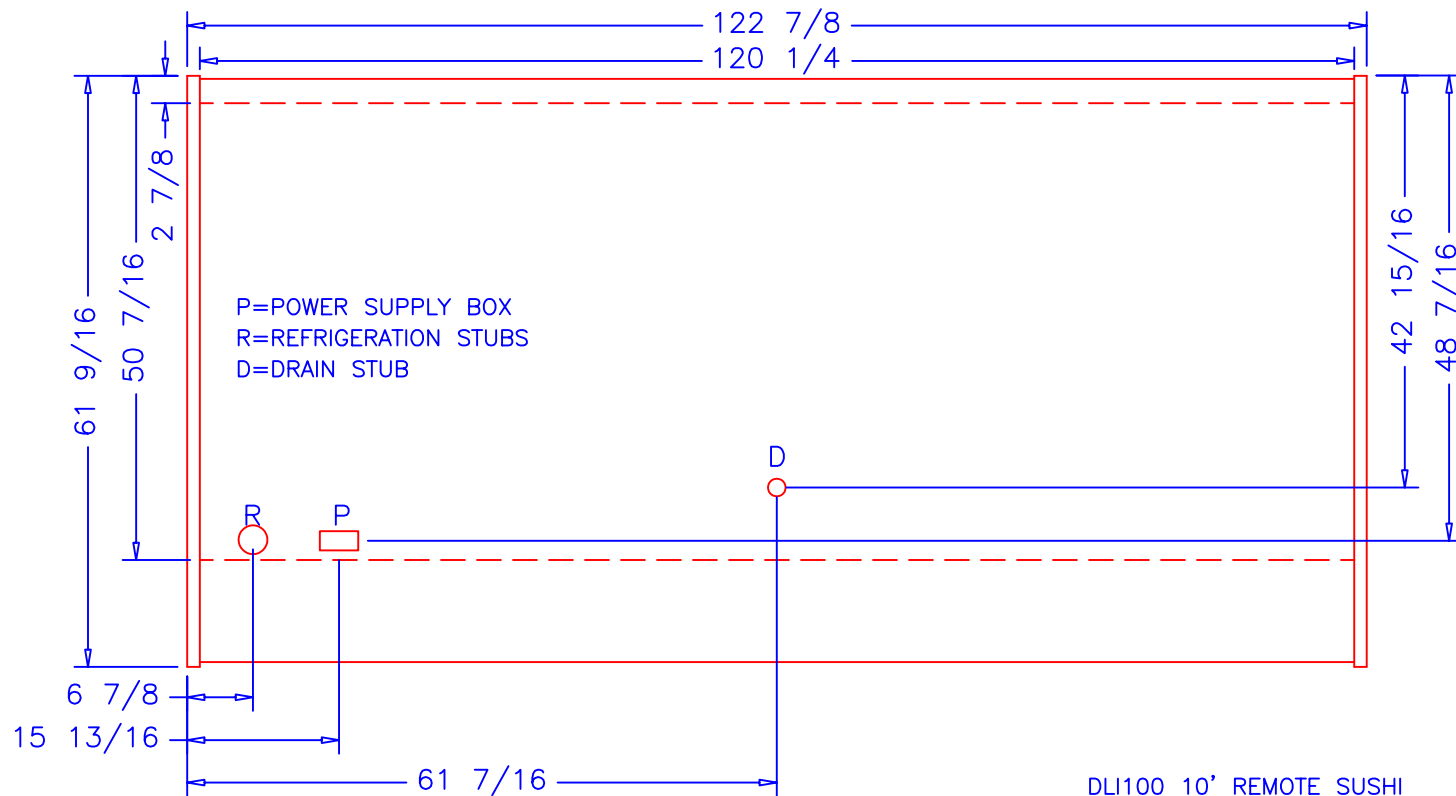

DLI100 10' REMOTE SUSHI SPECIFICATIONS:

REFRIGERATION

LOAD: 10000 BTU/hr
SUCTION TEMP: 20° F
LIQUID LINE: 3/8IN ODS
SUCTION LINE: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.

EVAP. FANS: 3.12A
LIGHT BALLAST: 1.5A
TOTAL: 4.62A

DLI100 10' REMOTE SUSHI REFRIGERATED REAR STORAGE SPECIFICATIONS:

REFRIGERATION

LOAD: 4000 BTU/hr
SUCTION TEMP: 20° F
LIQUID LINE: 3/8IN ODS
SUCTION LINE: 3/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.

EVAP. FANS: 3.00A
TOTAL: 3.00A

		börger systems	
		SCALE: 1:20	DLI100 SERIES DLI100 - 10PL
		DATE: 10-21-03	
			CHECKED BY:
		10' REMOTE SUSHI / FOOD PREP	
DATE	REV.	DIM: INCH	DRAWING NUMBER
REVISION		TOL: ±1/32	P4262A