
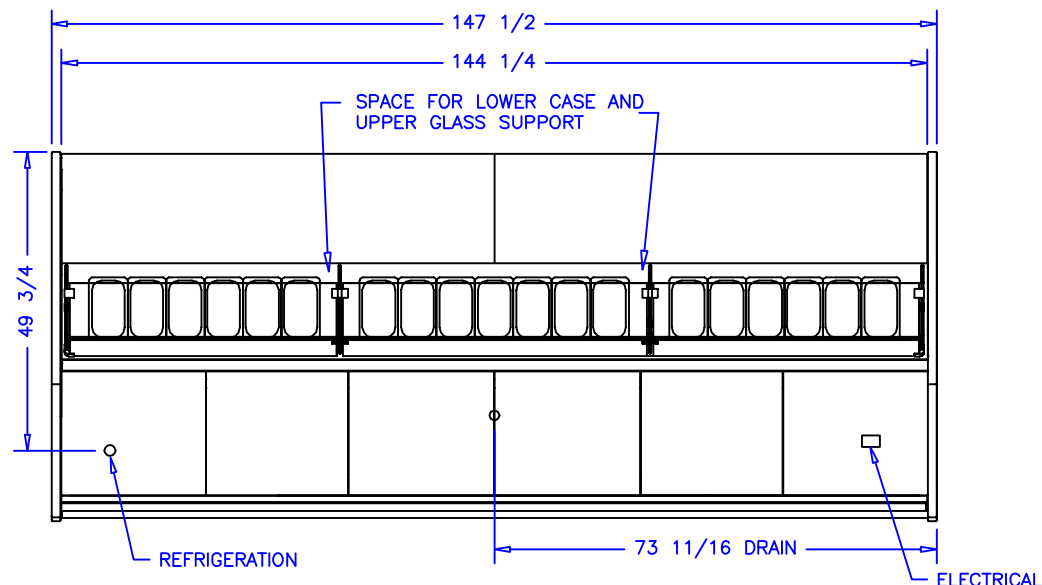


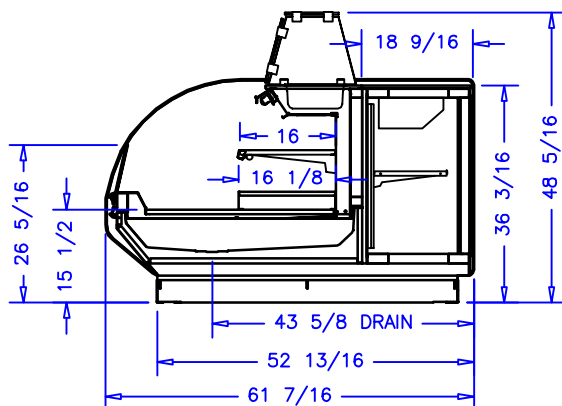

CASE SPECIFICATIONS:

REFRIGERATION:

CASE LOAD: 11,350 BTU/hr
COIL TEMP: 22° F
LIQUID STUB: 3/8IN ODS
SUCTION STUB: 5/8IN ODS

AIR DISCHARGE:
28° F @ 300 FPM

INITIAL DEFROST SETTING
6 PER DAY @ 40 MIN. EACH

ELECTRICAL 115VAC, 60HZ, 1PH.
EVAP. FANS: 1.8A
LIGHT BALLAST: 1.88A
TOTAL: 3.68A
MCA: 15.0A

ADDITIONAL CONNECTIONS FOR:
LIQUID LINE SOLENOID VALVE
DISCHARGE AIR PROBE

PANS: (19) 1/4 SIZE W/LIDS INCLUDED
STANDARD



NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):		DATE:		 börger systems	
SIGNATURE:					
				SCALE: 1:32	DRAWN BY: D HUNT
				DATE: 10-21-03	CHECKED BY:
		2-14-14 DRH 3-29-12 DRH		12FT PREP LOW BG12PL	
		DATE	REV.	DWG.	INCH
		REVISION	TOL:		
					DRAWING NUMBER P4263