
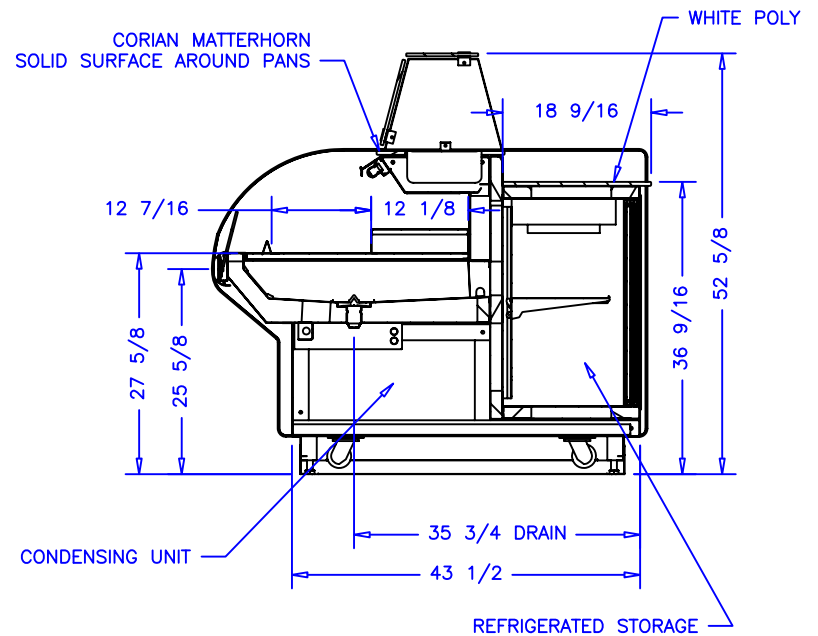


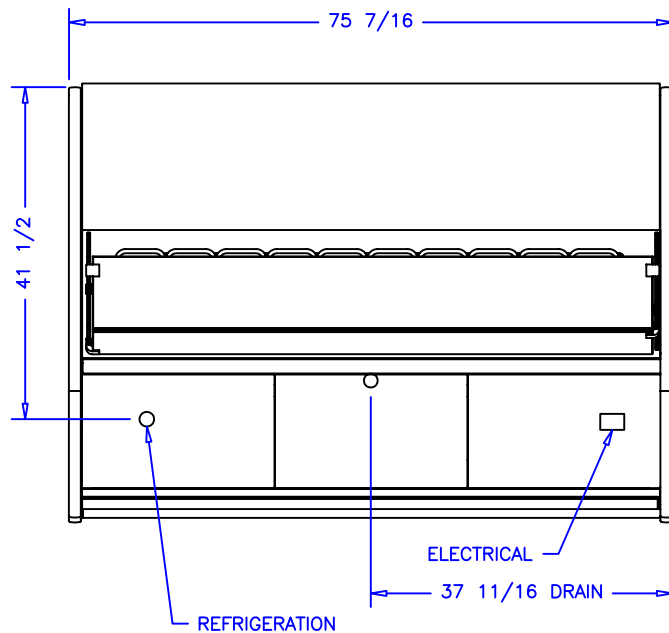

PANS: (10) 1/4 SIZE W/LIDS INCLUDED
STANDARD

WELL SIZE: 9 9/16" x 62 7/8"

CASE SPECIFICATIONS:


REFRIGERATION
LOAD: 5,670 BTU/hr
SUCTION TEMP: 22° F
LIQUID LINE: 3/8IN ODS
SUCTION LINE: 5/8IN ODS

28° F @ 300 FPM

INITIAL DEFROST SETTING
6 PER DAY @ 40 MIN. EACH

ELECTRICAL 115VAC, 60HZ, 1PH.
EVAP. FANS: .82A
LIGHT BALLAST: 1.48A
TOTAL: 2.30A
MCA: 15.0A

ELECTRICAL 208/230VAC, 60HZ, 1PH.
EVAP. PAN: 7.2A
3/4 HP COND. UNIT: 6.8A
TOTAL: 14.0A
MCA: 16.8A

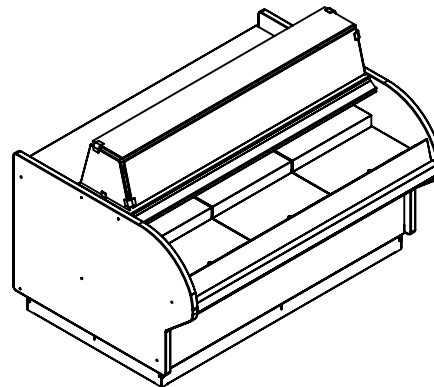

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.



AUTHORIZATION (PRINT):		DATE:									
SIGNATURE:											
3-2-10		DRH		SCALE: 1:24				DRAWN BY: DWT			
1-10-06		DRH		DATE: 11-12-04				CHECKED BY:			
12-20-05		DRH									
10-27-03		DWT									
DATE		REV.		DIM:		INCH					
REVISION				TOL:							
 börger systems								6' FOOD PREP HIGH BG6PH			
								DRAWING NUMBER			
								P4374			