

CASE SPECIFICATIONS:


REFRIGERATION

LOAD: 10,700 BTU/hr
 SUCTION TEMP: 20° F
 LIQUID LINE: 3/8IN ODS
 SUCTION LINE: 1/2IN ODS


ELECTRICAL 115V, 60HZ, 1PH.
 LIGHTS: 4.88A
 TOTAL: 4.88A
 MCA: 15.0A

ELECTRICAL 115V, 60HZ, 1PH.
 EVAP. FANS: 0.26A
 COND. PUMP: 1.0A
 TOTAL: 1.26A
 MCA: 15.0A


ELECTRICAL 208/230V, 60HZ, 1PH.
 CONDENSING UNIT: 10.9A
 CONDENSATE PAN: 14.4A
 TOTAL: 25.3A
 MCA: 30.9A

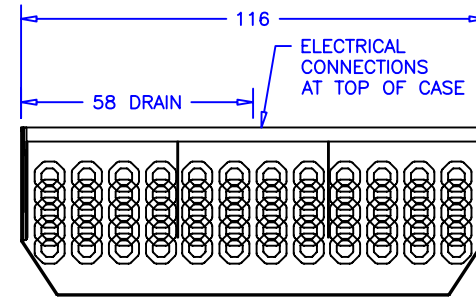


OPTION A

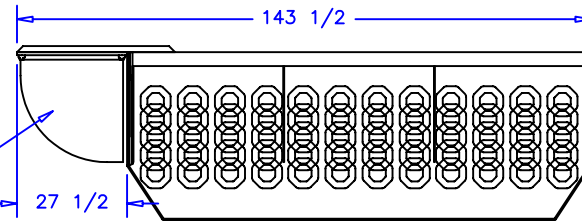

OPTION B

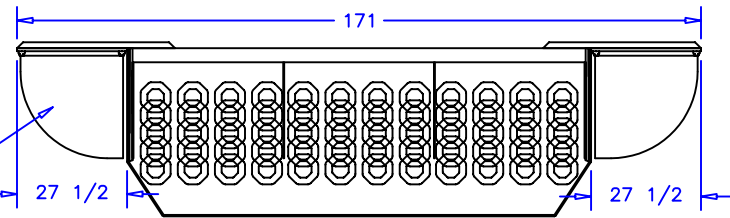


OPTION C

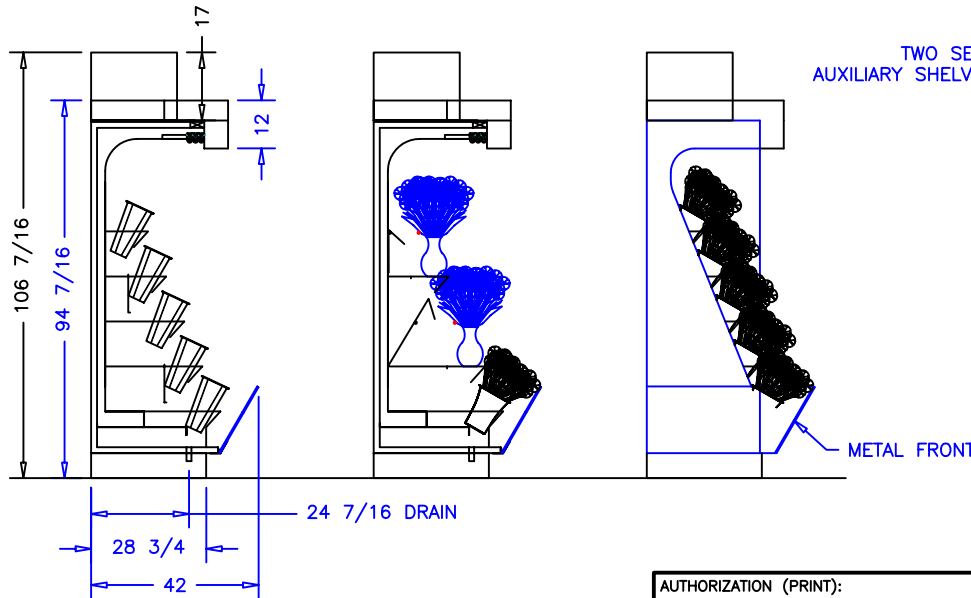

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):	DATE:	 börger systems		DRAWN BY: D HUNT
SIGNATURE:	4-7-08 DRH			SCALE: 1:48
	1-16-07 DRH	DATE: 9-15-04		
	10-5-06 DRH	10FT FLOWER BASKET W/SHLV		
	9-19-06 DRH	DATE:	DRAWING NUMBER	
	6-27-05 DRH	TOL:	P4516A	
DATE	REV.	DIM.	INCH	
REVISION		TOL:		