
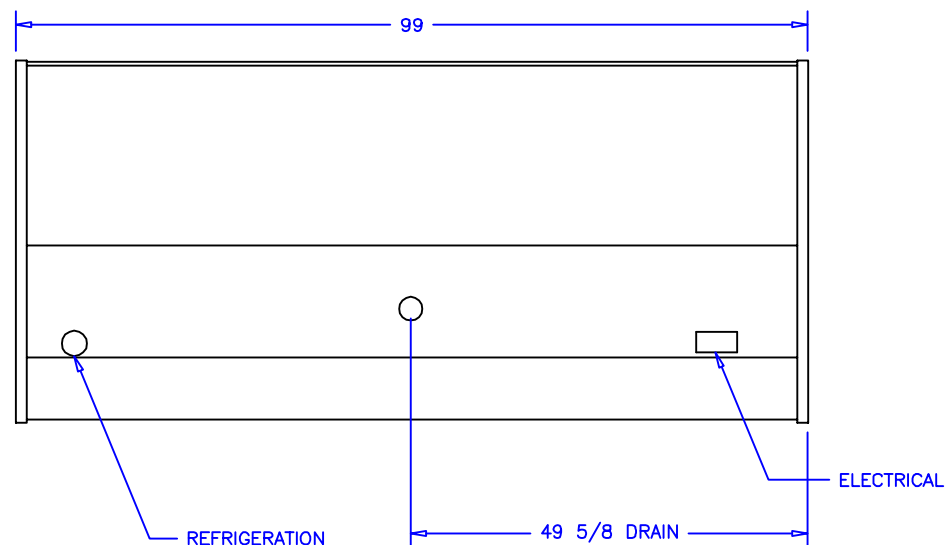


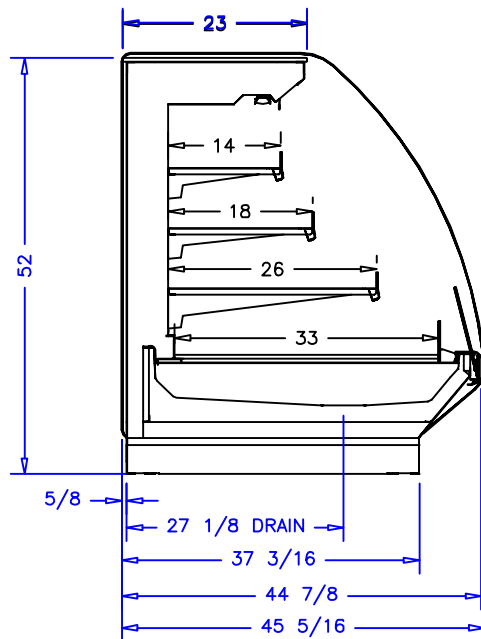

CASE SPECIFICATIONS:

REFRIGERATION:

CASE LOAD: 10,000 BTU/hr
COIL TEMP: 22° F
LIQUID STUB: 3/8IN ODS
SUCTION STUB: 5/8IN ODS

AIR DISCHARGE:

28° F @ 300 FPM

INITIAL DEFROST SETTING

6 PER DAY @ 40 MIN. EACH

ELECTRICAL 115VAC, 60HZ, 1PH.

ECM EVAP. FANS: .80A
LED LIGHTS: 2.4A
TOTAL: 3.2A
MCA: 15.0A

ADDITIONAL CONNECTIONS FOR:

LIQUID LINE SOLENOID VALVE
DISCHARGE AIR PROBE



NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):		DATE:		12-10-13 9-25-13 6-19-09 1-4-07 2-7-06 2-3-06 DRH DRH DRH DRH DRH DRH				DRAWN BY: D HUNT	
SIGNATURE:		DATE: 12-14-05		CHECKED BY:					
		8' SELF SERV. MERCH.		BG8SSM					
REVISION		REV.		DIN: INCH					
		TOL:		DRAWING NUMBER					
				P4754					