
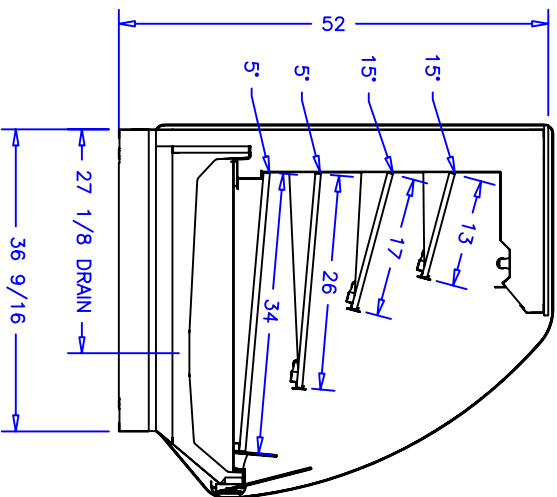


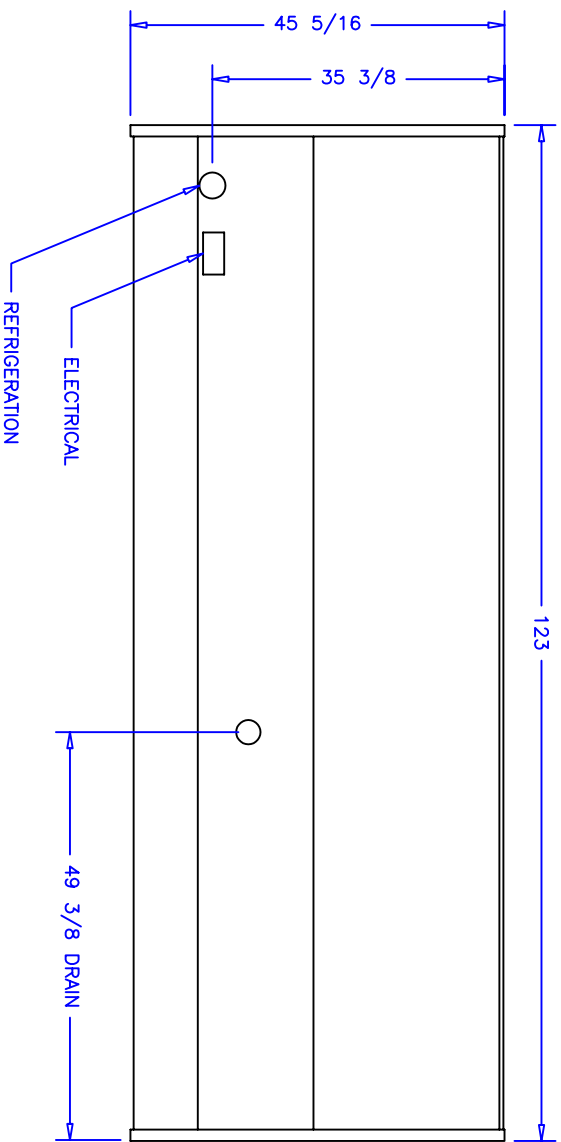

CASE SPECIFICATIONS:

REFRIGERATION
LOAD: 9,600 BTU/hr
SUCTION TEMP: 20° F
LIQUID LINE: 3/8IN ODS
SUCTION LINE: 5/8IN ODS
ELECTRICAL 115VAC, 60HZ, 1PH.
EVAP. FANS: 3.12A
LIGHT BALLAST: 2.00A
TOTAL: 5.12A
MCA: 15.0A

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):

DATE:



börger systems

SIGNATURE:

SCALE: 1:24
DATE: 2-3-06

DRAWN BY: D HUNT
CHECKED BY:

10' SELF SERV. MERCH. BG10SSM

2-7-06 DRH
DATE REV
REVISION

10' SELF SERV. MERCH. BG10SSM
DWM INCH
TOL.

DRAWING NUMBER
P4824A