

BOTTLE COUNT: 1600


CASE SPECIFICATIONS:

TOP AREA: 204
SQR FT

REFRIGERATION LOAD: 27,270 BTU/hr
COIL: CTA 66-232
SUCTION TEMP: 30° F
LIQUID: 3/8IN ODS
SUCTION: 7/8IN ODS


ELECTRICAL 115VAC, 60HZ, 1PH.
EVAP. FANS: 6.6A
LIGHTS: 15.0A
CONDENSATE PUMP: 1.0A
TOTAL: 22.6A

ELECTRICAL 208/230VAC, 60HZ, 1PH.
CONDENSATE PAN: 14.4A
TOTAL: 14.4A

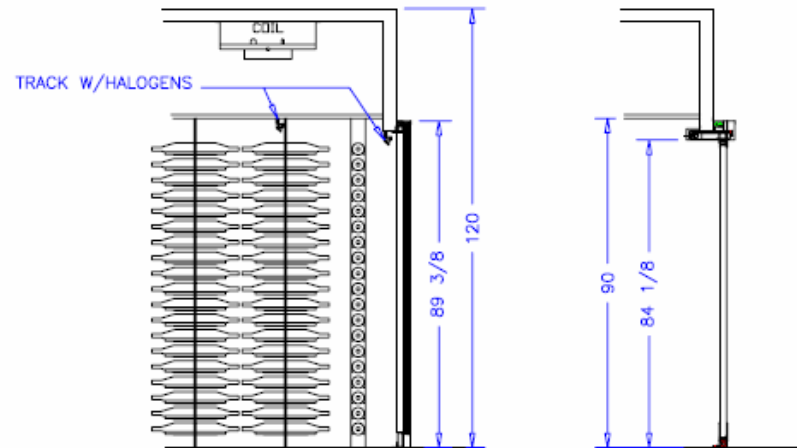

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):	DATE:	 börger systems		SCALE: 1:32	DRAWN BY: D. HUNT
SIGNATURE:				DATE: 9-13-07	CHECKED BY:
		14 x 16, 1 BTD WINE CSRV			
DATE	REV	DRG	INCH	DRAWING NUMBER	
REVISION		TOL:		P5202A	