
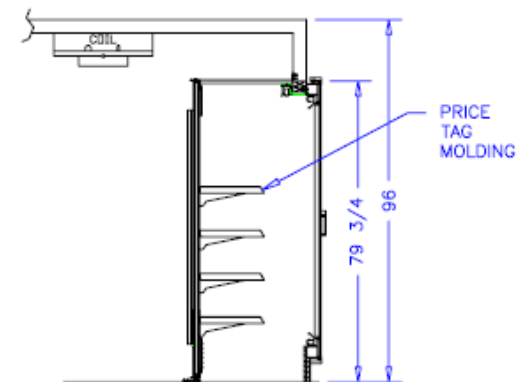


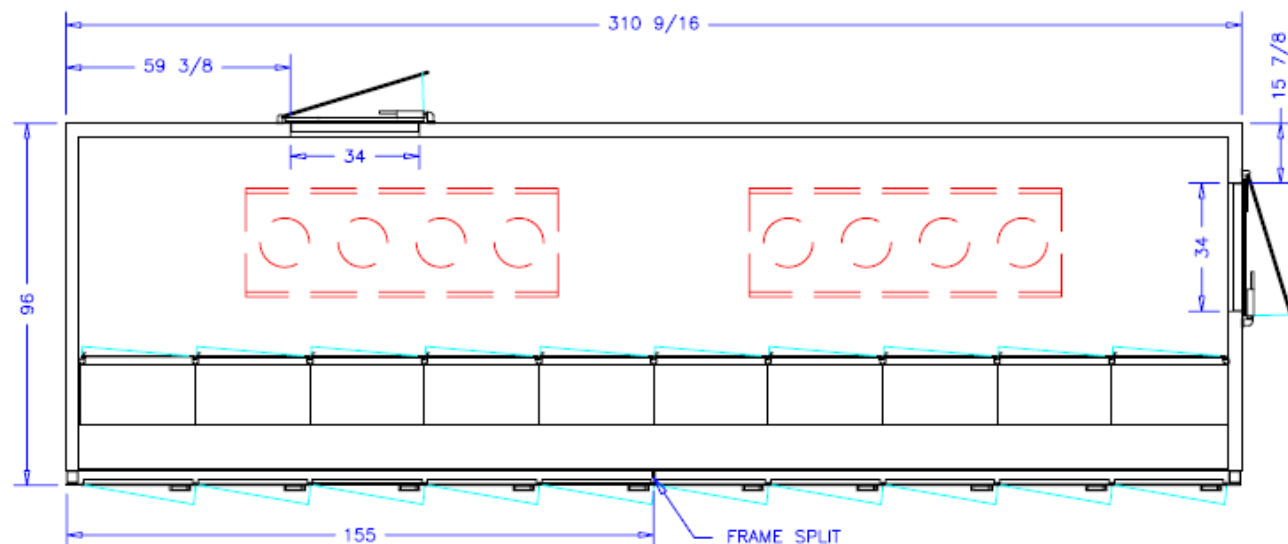

CASE SPECIFICATIONS:

TOP AREA: 199 SQ. FT.

REFRIGERATION LOAD: 20,400 BTU/hr

COIL: (2) CTA 48-112

SUCTION TEMP: 20° F

LIQUID: 3/8IN ODS

SUCTION: 7/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.

EVAP. FANS: 8.8A

MERCH. LIGHTS: 3.76A

STORAGE LIGHTS: 1.6A

TOTAL: 14.16A

WALIN COOLER INFORMATION:

LIGHT SWITCH ADJACENT SERVICE DOOR.

THERMOMETER ABOVE LIGHT SWITCH.

VENT ABOVE THE SERVICE DOOR.

DISPLAY INFORMATION:

BACK GLASS PANELS ON DIVIDING WALL ARE

HINGED FOR REAR STOCKING.

METAL SHELVES ARE HEIGHT ADJUSTABLE.

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):	DATE:	 börger systems	
SIGNATURE:	SCALE: 1:48	DRAWN BY: D. HUNT	
	DATE: 3-6-08	CHECKED BY:	
	10 DOOR WOD		
	DATE	REV	DRW
REVISION	TOL:	DRAWING NUMBER: P5349A	