


CASE SPECIFICATIONS:


REFRIGERATION:

LOAD: 14,900 BTU/hr  
 SUCTION TEMP: 20°F  
 SUCTION LINE: 5/8" IN ODS  
 LIQUID LINE: 3/8" IN ODS


ELECTRICAL 115V, 60HZ, 1PH  
 EVAP. FANS: 0.39A  
 TOTAL: 0.39A  
 MCA: 15.0A

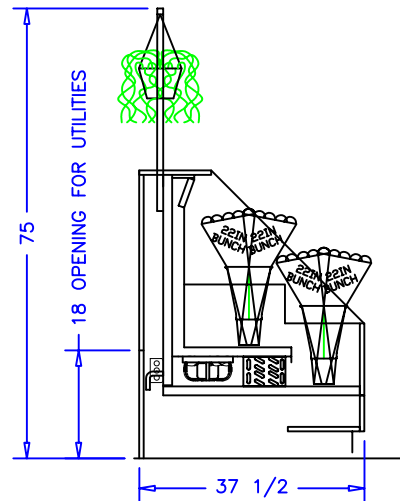


LEFT LEG

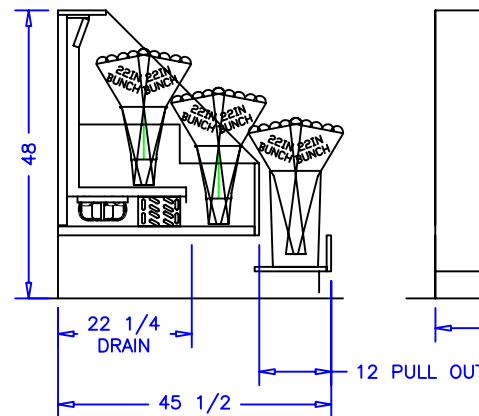

RIGHT LEG




RIGHT LEG

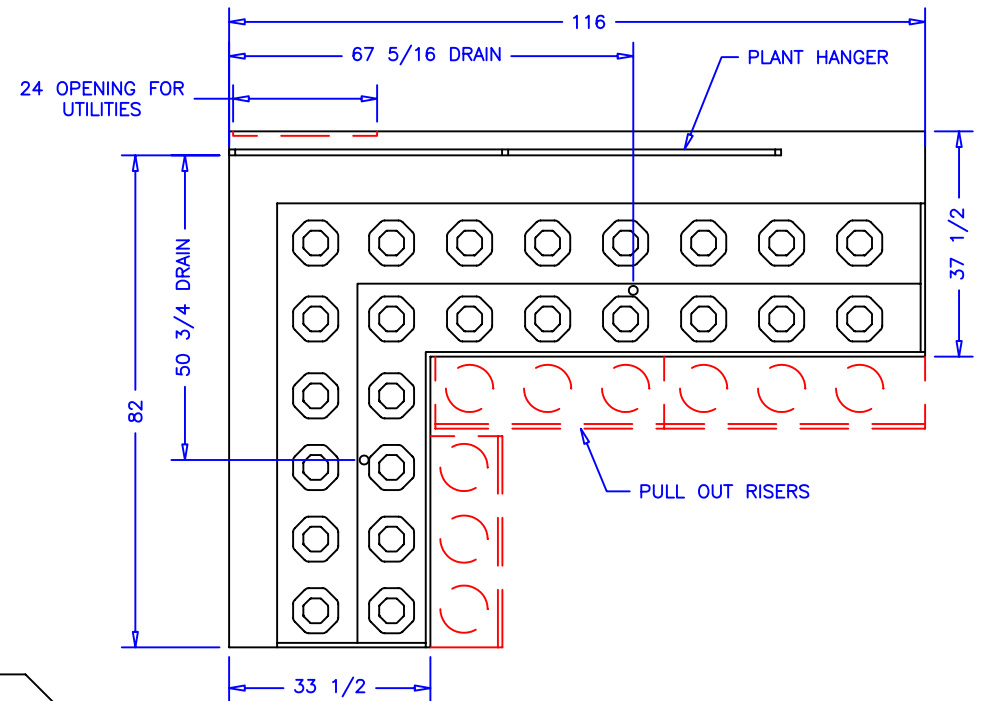

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):		DATE:		 <b>börger systems</b>	
SIGNATURE:					
				SCALE: 1:32	DRAWN BY: D HUNT
				DATE: 3-13-08	CHECKED BY:
				7FT x 10FT LPM INSIDE WRAP	
DATE	REV.	DIM:	INCH	DRAWING NUMBER P5359A	
REVISION	TOL:				