
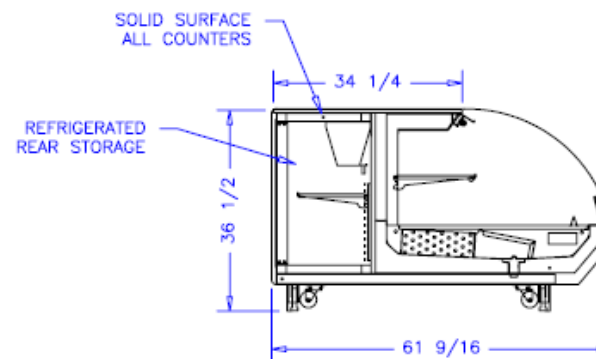


SPECIFICATIONS:

REFRIGERATION

LOAD: 11,200 BTU/hr
GLYCOL TEMP: 20F
%G CON: 35
GPM: 2.5
PRES. DROP: 4.2
LINE: 7/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.
EVAP. FANS: 5.08A
LIGHT BALLAST: 1.5A
TOTAL: 6.58A
MCA: 15.0A

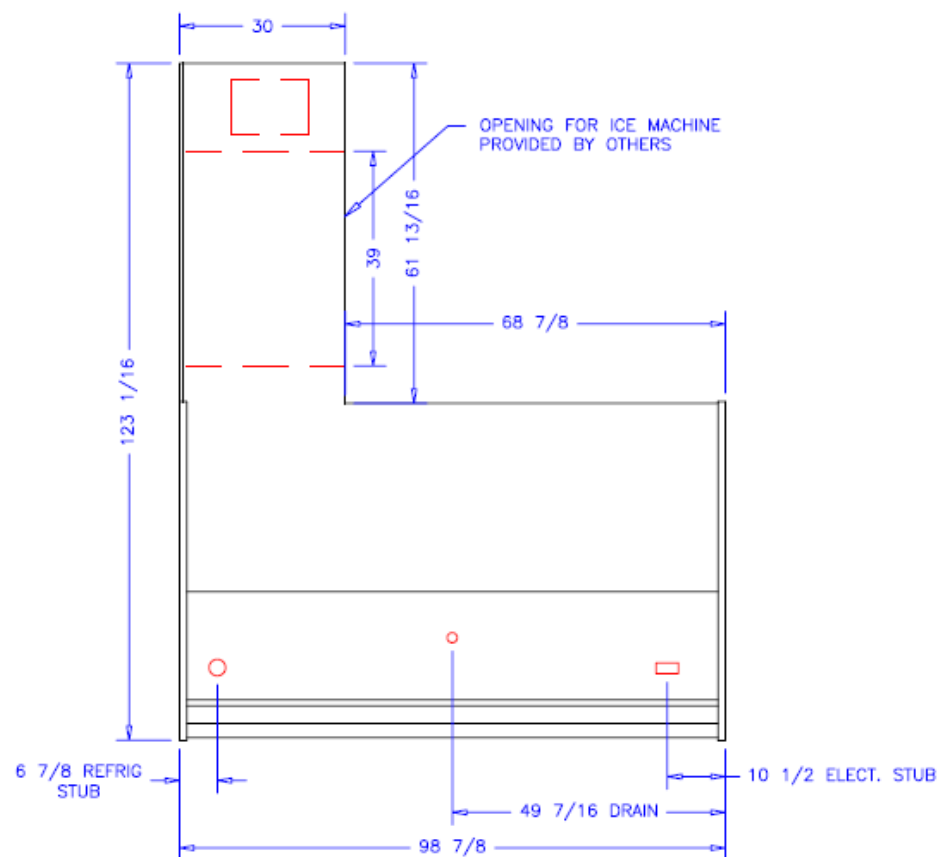

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):		DATE:		börger systems	
SIGNATURE:		SCALE: 1:32		DRAWN BY: D HUNT	
		DATE: 5-15-08		CHECKED BY:	
		8FT JUICE BAR "L"			
DATE	REV	DN	INCH	DRAWING NUMBER	
REVISION	TOL			P5413A	