



CASE SPECIFICATIONS:

REFRIGERATION
 LOAD: 13,200 BTU/hr
 COIL TEMP: 25° F
 LIQUID STUB: 3/8IN ODS
 SUCTION STUB: 1/2IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.
 EVAP. FANS: .52A
 TOTAL: .52A
 MCA: 15.0A

- NOTES:**
1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
 2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
 3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
 4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
 5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
 6. DRAIN: 1 1/2 INCH PVC.
 7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

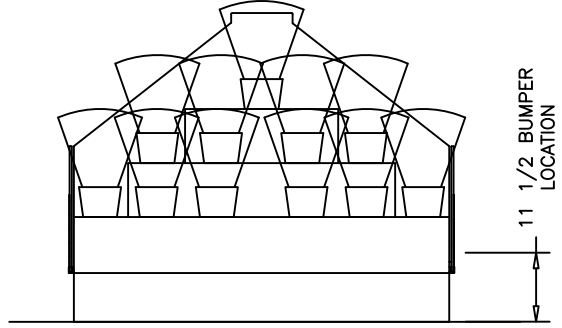

AUTHORIZATION (PRINT):		DATE:		 börgeren systems		DRAWN BY: D HUNT	
SIGNATURE:						CHECKED BY:	
3-28-13	DRH	SCALE:	1:32	12FT LPM FIELD OF FLOWERS			
8-17-12	DRH	DATE:	6-17-08				
12-8-08	DRH						
11-24-08	DRH			DRAWING NUMBER		P5435	
DATE	REV.	DN:	INCH	REVISION		TOL:	