



CASE SPECIFICATIONS:

TOP AREA: 118 SQR FT

REFRIGERATION LOAD: 18,500 BTU/hr
 COIL: (2) CTA 36-93


ELECTRICAL 115VAC, 60HZ, 1PH.
 EVAP. FANS: 6.6A
 LIGHTS: 20.0A
 TOTAL: 26.6A
 MCA: 35.0A

REMOTE LOCATED CONDENSING UNIT
 ELECTRICAL 208/230VAC, 60HZ, 1PH.
 2 HP. COND. UNIT: 10.9A
 TOTAL: 10.9A
 MCA: 15.9A

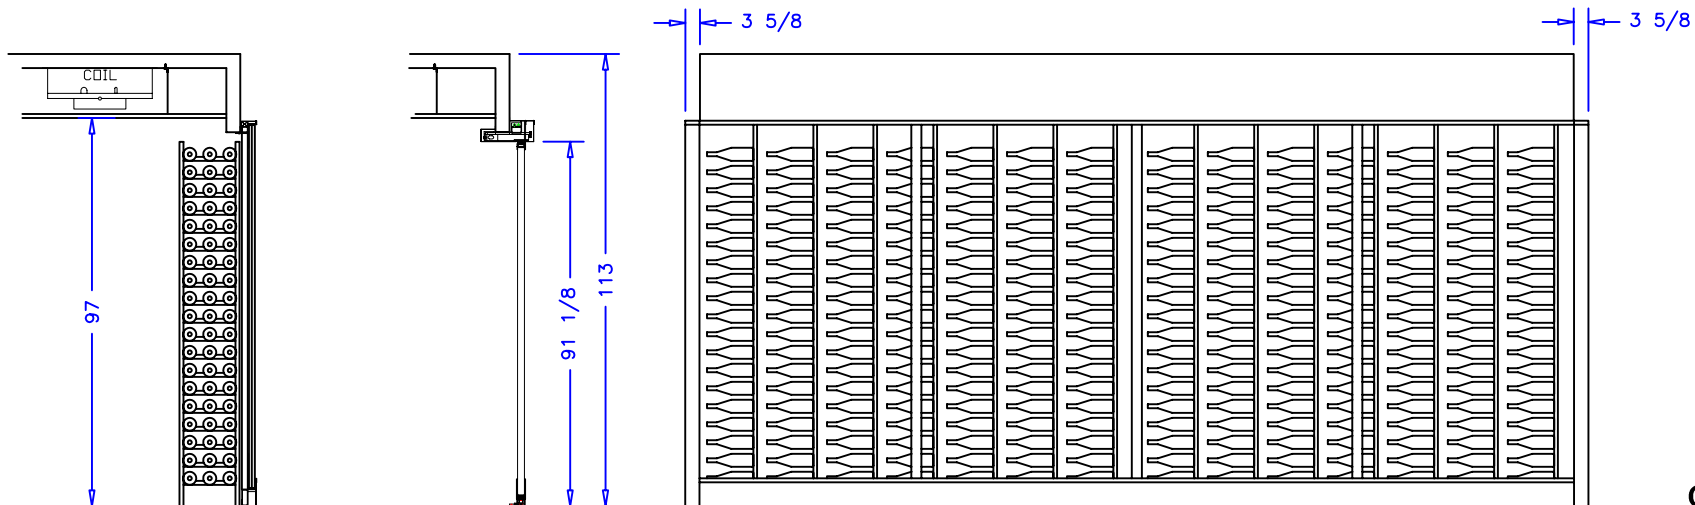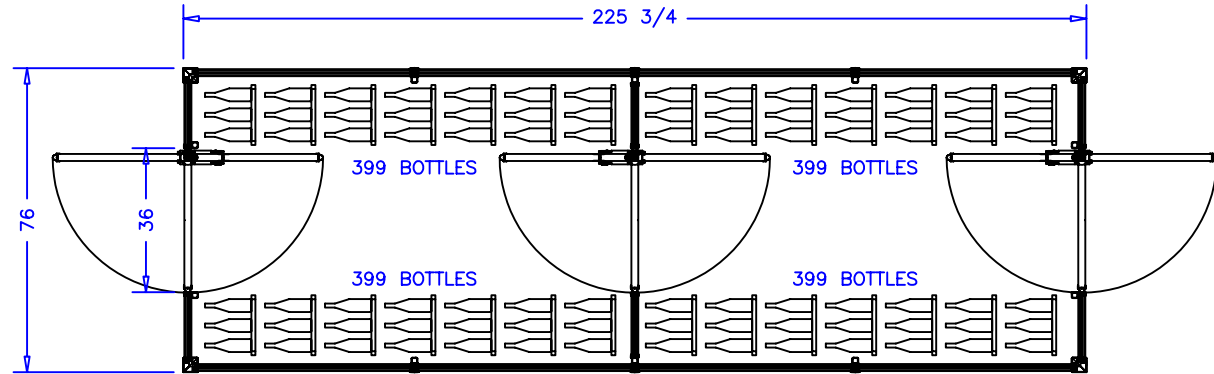

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):		DATE:		 börger systems		SCALE: 1:48		DRAWN BY: D HUNT	
SIGNATURE:						DATE: 12-11-08		CHECKED BY:	
3 BTD WINE CSRV									
DATE		REV.		DIM: INCH		DRAWING NUMBER		P5555	
REVISION		TOL:							