




CASE SPECIFICATIONS:

REFRIGERATION:
CASE LOAD: 5,200 BTU/hr
COIL TEMP: 22° F
LIQUID STUB: 3/8IN ODS
SUCTION STUB: 5/8IN ODS

AIR DISCHARGE:
30° F @ 320 FPM

INITIAL DEFROST SETTING
6 PER DAY @ 30 MIN. EACH

ELECTRICAL 115VAC, 60HZ, 1PH.
EVAP. FANS: .36A
LIGHT BALLAST: .74A
TOTAL: 1.10A
MCA: 15.0A

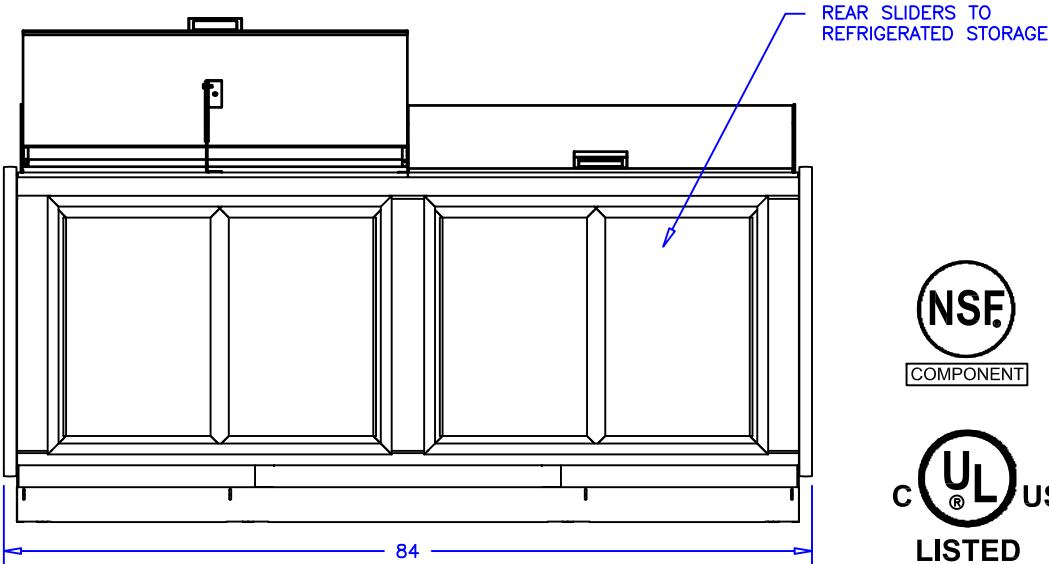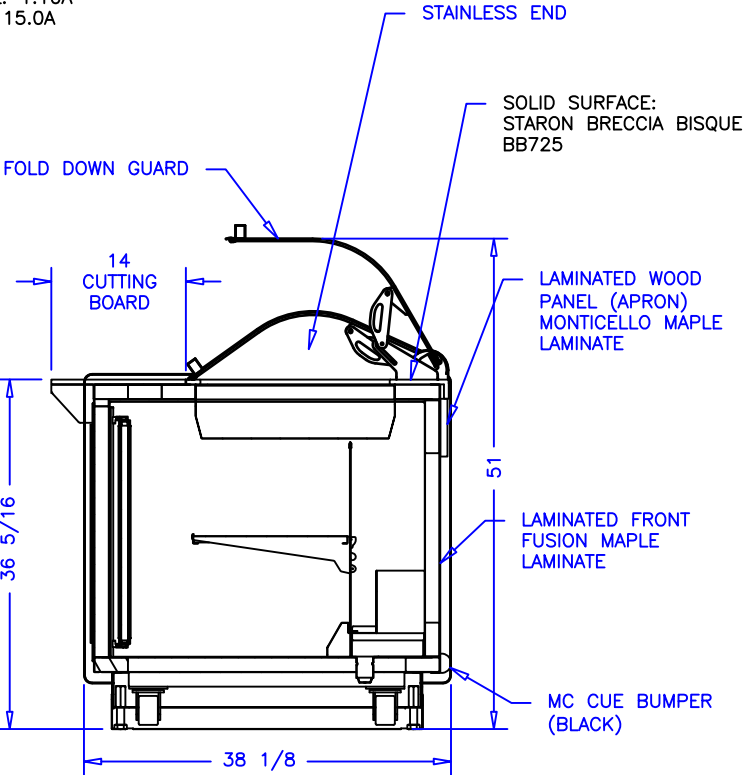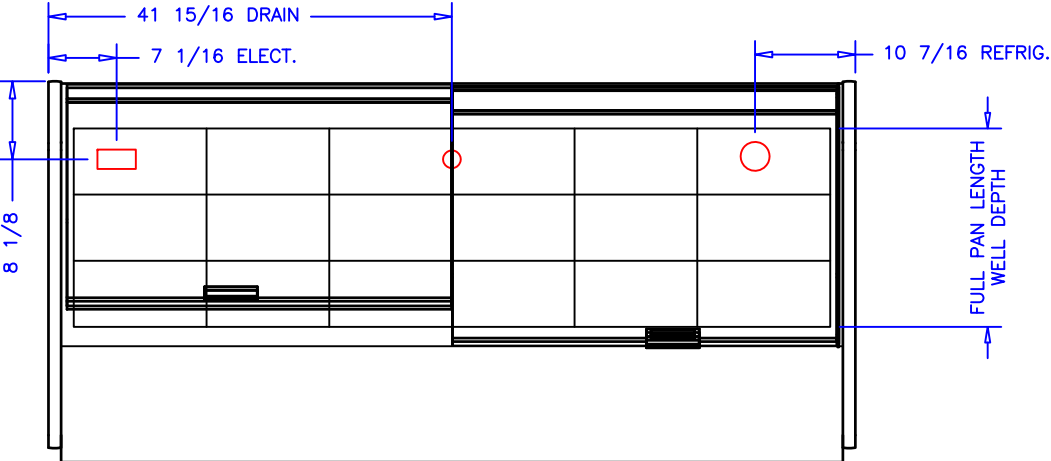

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):	DATE:			börger systems	
SIGNATURE:		SCALE: 1:20		DRAWN BY: D HUNT	
		DATE: 5-6-09		CHECKED BY:	
		9-8-10 DRH	7' GOURMET SANDWICH		BG7GSD
		9-3-09 DRH			
		DATE	REV.	DIM:	INCH
		REVISION		TOL:	
					DRAWING NUMBER P5629