

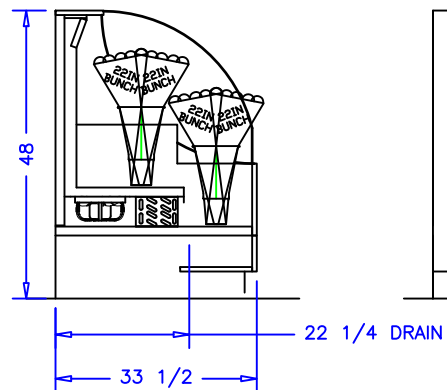
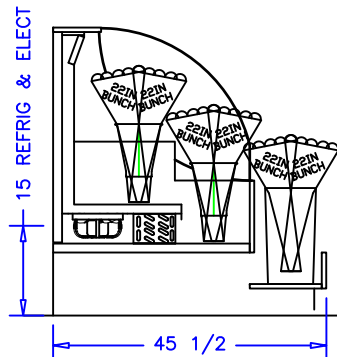


CASE SPECIFICATIONS:

REFRIGERATION:

LOAD: 9,720 BTU/hr
 COIL TEMP: 20°F
 SUCTION STUB: $\frac{5}{8}$ " IN ODS
 LIQUID STUB: $\frac{3}{8}$ " IN ODS

ELECTRICAL 115V, 60HZ, 1PH
 EVAP. FANS: 0.60A
 TOTAL: 0.60A
 MCA: 15.0A

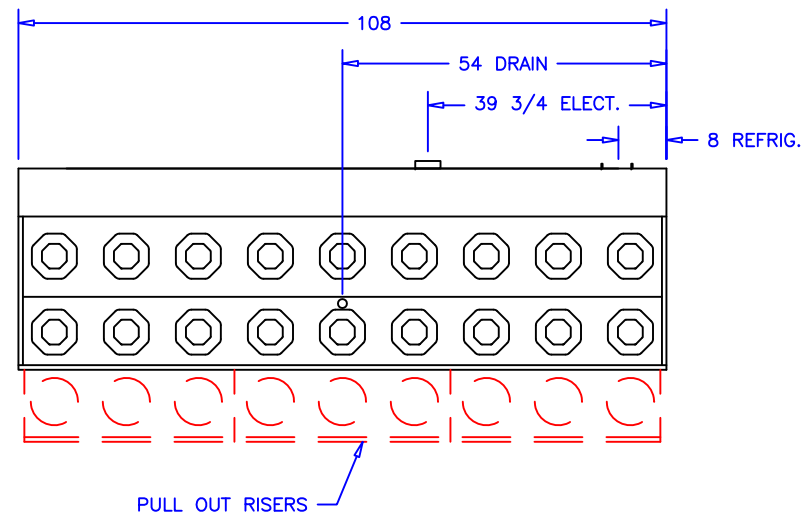

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):		DATE:		 börger systems	
SIGNATURE:					
				SCALE: 1:32	DRAWN BY: D HUNT
				DATE: 7-16-09	CHECKED BY:
		4-8-11 SEH	9FT LPM W/DRAWERS		
		5-27-10 DRH			
		DATE	REV.	DIM:	INCH
		REVISION	TOL:		DRAWING NUMBER
				P5668	