

CASE SPECIFICATIONS:

REFRIGERATION:

CASE LOAD: 3,900 BTU/hr
COIL TEMP: 22° F
LIQUID STUB: 3/8IN ODS
SUCTION STUB: 5/8IN ODS

AIR DISCHARGE:

30° F @ 340 FPM

INITIAL DEFROST SETTING

6 PER DAY @ 30 MIN. EACH




ELECTRICAL 115VAC, 60HZ, 1PH.

EVAP. FANS: .36A

LIGHT BALLAST: .74A

TOTAL: 1.10A

MCA: 15.0A

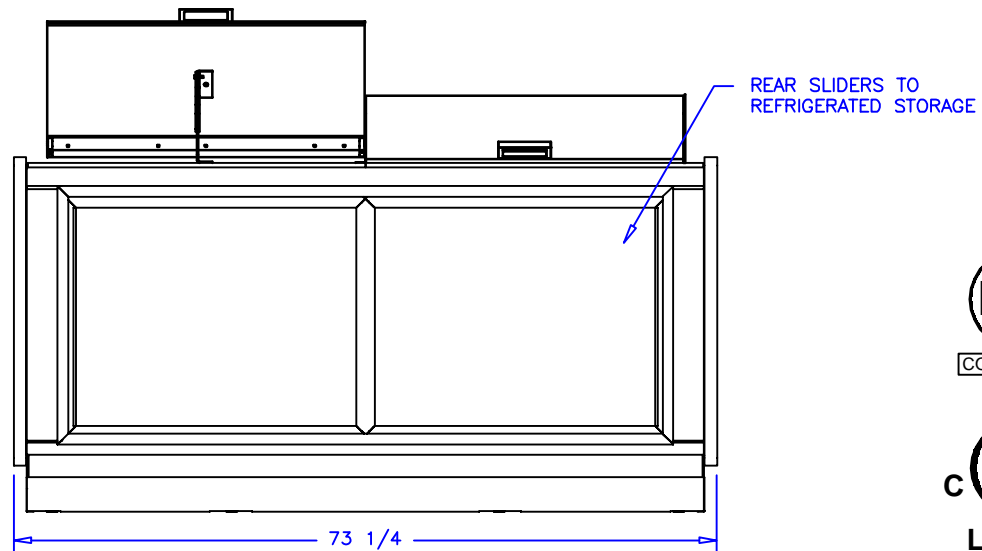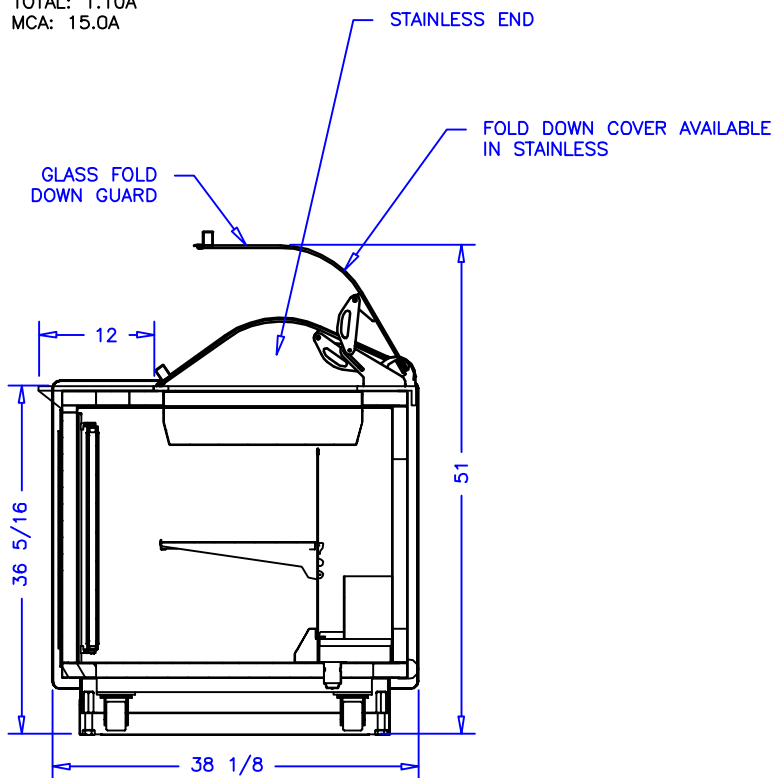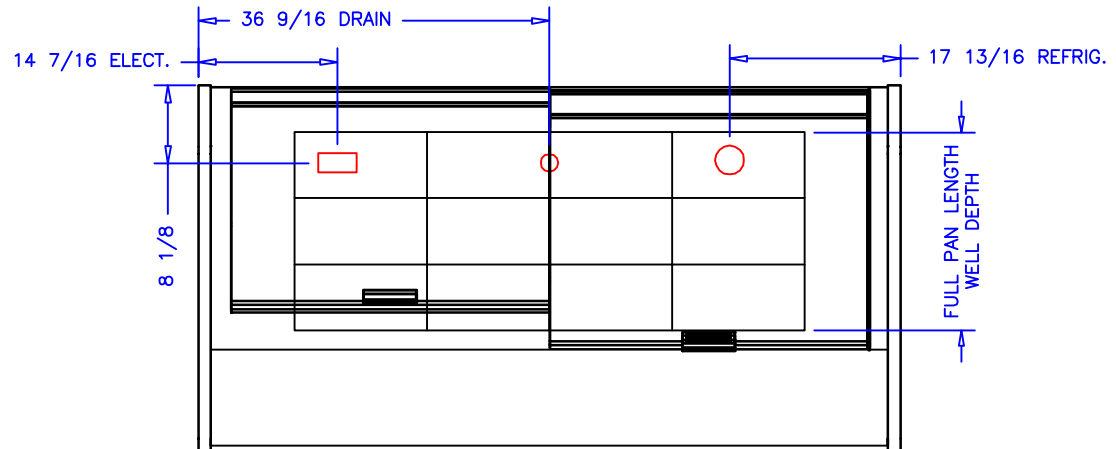

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.




COMPONENT



LISTED

37X1
COMMERCIAL REFRIGERATOR
LESS CONDENSING UNIT

AUTHORIZATION (PRINT):		DATE:		 börger systems		SCALE: 1:20		DRAWN BY: D HUNT	
SIGNATURE:						DATE: 8-20-09		CHECKED BY:	
				6' GOURMET SANDWICH PREP					
DATE:		REV:		DIM: INCH		DRAWING NUMBER		P5693	
REVISION		TOL:							