

CASE SPECIFICATIONS:




REFRIGERATION:

CASE LOAD: 2,600 BTU/hr
GLYCOL TEMP: 22°F
%G CON: 35
GPM: 1.3
LINE: 7/8IN ODS

AIR DISCHARGE:
30° F @ 360 FPM

INITIAL DEFROST SETTING
6 PER DAY @ 30 MIN. EACH

ELECTRICAL 115VAC, 60HZ, 1PH.
EVAP. FANS: .36A
LIGHT BALLAST: .74A
TOTAL: 1.10A
MCA: 15.0A

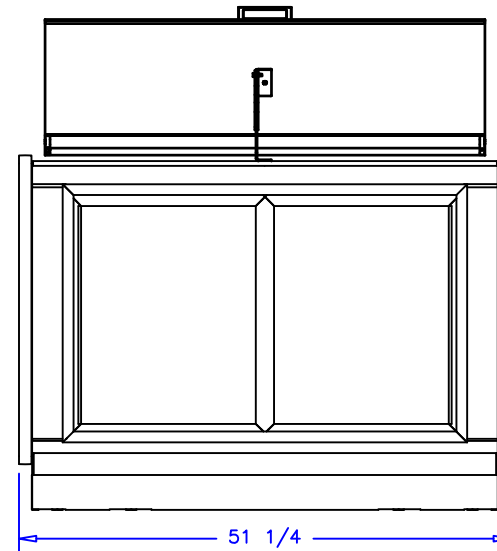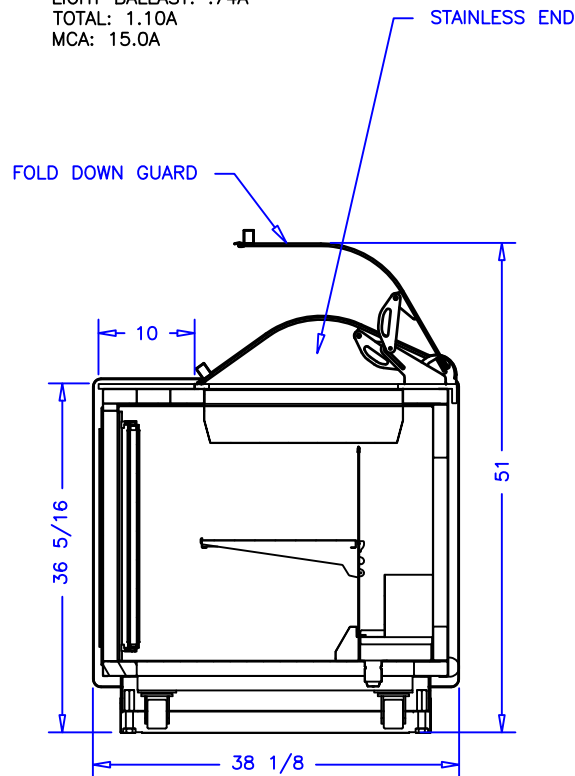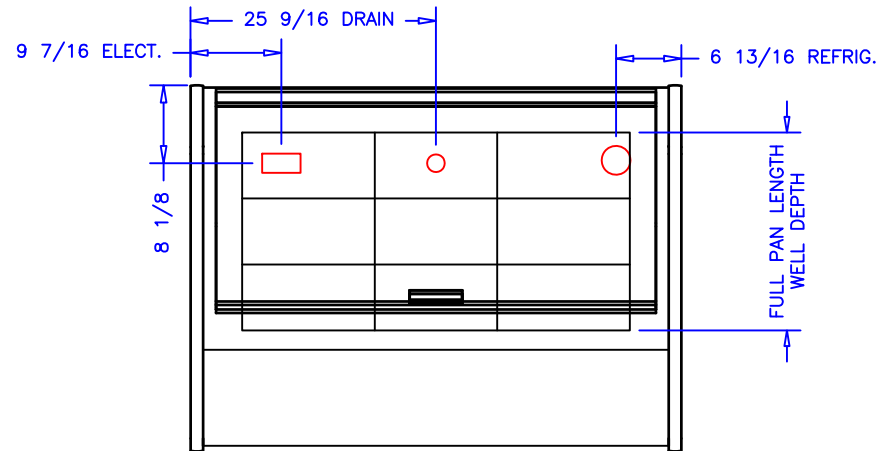

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.



AUTHORIZATION (PRINT):		DATE:		 börger systems		SCALE: 1:20		DRAWN BY: D HUNT	
SIGNATURE:						DATE: 8-20-09		CHECKED BY:	
				4' GOURMET SANDWICH				BG4GSD	
DATE		REV.		DIM: INCH				DRAWING NUMBER	
REVISION		TOL:						P5694	