

CASE SPECIFICATIONS:

REFRIGERATION:

CASE LOAD: 14,700 BTU/hr
 COIL TEMP: 22° F
 LIQUID STUB: 3/8IN ODS
 SUCTION STUB: 5/8IN ODS

AIR DISCHARGE:

28° F @ 270 FPM

INITIAL DEFROST SETTING



6 PER DAY @ 40 MIN. EACH

ELECTRICAL 115VAC, 60HZ, 1PH.

EVAP. FANS: 2.1A
 TOTAL: 2.1A
 MCA: 15.0A

ADDITIONAL CONNECTIONS FOR:


LIQUID LINE SOLENOID VALVE
 DISCHARGE AIR PROBE

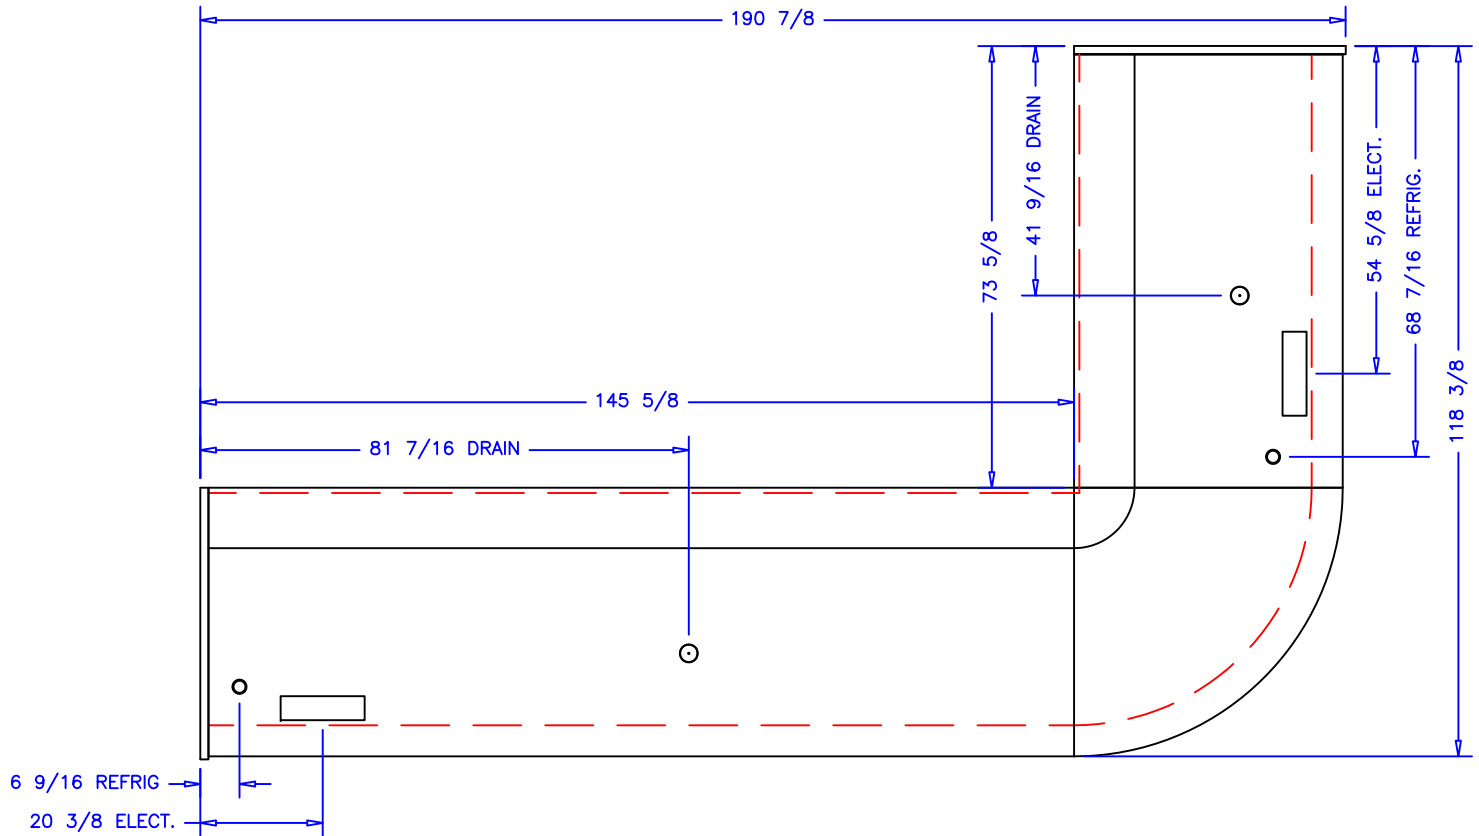

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.



AUTHORIZATION (PRINT):		DATE:		 börgeren systems	
SIGNATURE:					
				DATE: 2-16-11	CHECKED BY:
CHEESE KIOSK 12W6					
DATE	REV.	DIM:	INCH	DRAWING NUMBER	
REVISION	TOL:			P5985	