


#### CASE SPECIFICATIONS:

REFRIGERATION:  
LOAD: 3,900 BTU/hr  
COIL TEMP: 25°F  
LIQUID STUB: 3/8IN ODS  
SUCTION STUB: 5/8IN ODS


ELECTRICAL 115V, 60HZ, 1PH  
EVAP. FANS: 0.30A  
TOTAL: 0.30A  
MCA: 15.0A

NON-REFRIGERATED  
PULL OUT

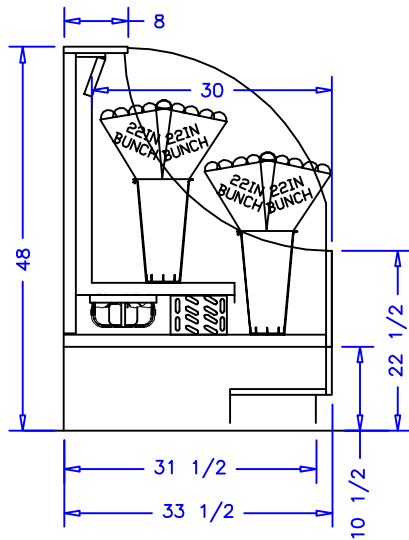

GLASS END


LAMINATE EXTERIOR  
TBD

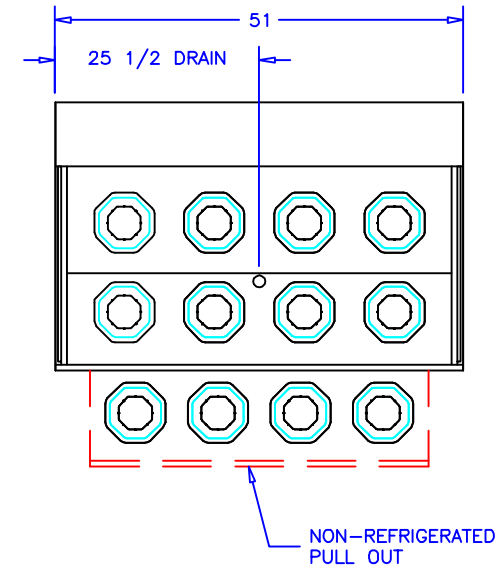

NON-REFRIGERATED  
PULL OUT

#### NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):		DATE:		 <b>börger systems</b>	
SIGNATURE:					
				SCALE: 1:32	DRAWN BY: D HUNT
				DATE: 11-8-12	CHECKED BY:
				4FT LPM	
DATE	REV.	DWG.	INCH	DRAWING NUMBER	
REVISION	TOL:			P6332	