


CASE SPECIFICATIONS:

REFRIGERATION:


LOAD: 6,480 BTU/hr
 SUCTION TEMP: 25°F
 SUCTION LINE: 5/8" IN ODS
 LIQUID LINE: 3/8" IN ODS

ELECTRICAL 115V, 60HZ, 1PH
 EVAP. FANS: 0.30A
 TOTAL: 0.30A
 MCA: 15.0A

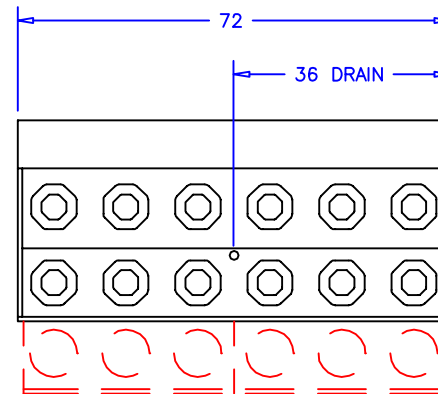


NON-REFRIGERATED
 PULL OUT

LAMINATE EXTERIOR
 TBD

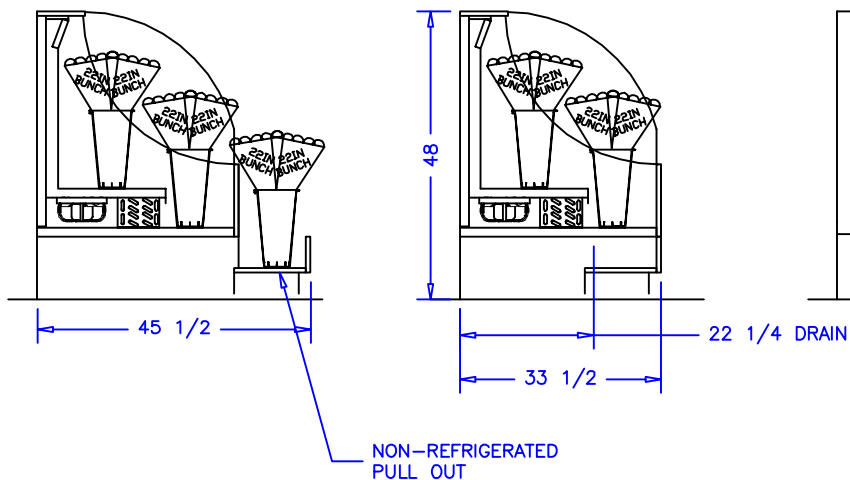

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):		DATE:		 börger systems	
SIGNATURE:					
				SCALE: 1:32	DRAWN BY: D HUNT
				DATE: 8-22-13	CHECKED BY:
				6FT LPM W/DRAWERS	
DATE	REV.	DIM.	INCH		
REVISION	TOL.			DRAWING NUMBER P6498	