

CASE SPECIFICATIONS:

REFRIGERATION:

LOAD: 8,640 BTU/hr

COIL TEMP: 25°F

SUCTION STUB: 5/8" IN ODS


LIQUID STUB: 3/8" IN ODS

ELECTRICAL 115V, 60HZ, 1PH


EVAP. FANS: 0.60A

TOTAL: 0.60A

MCA: 15.0A

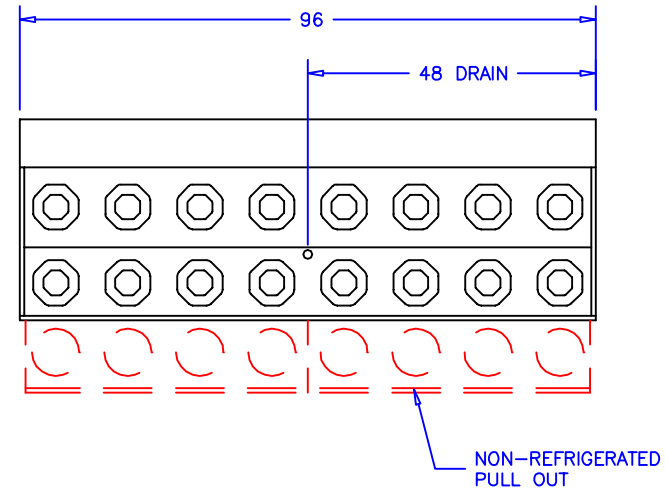


LAMINATE EXTERIOR  
TBD

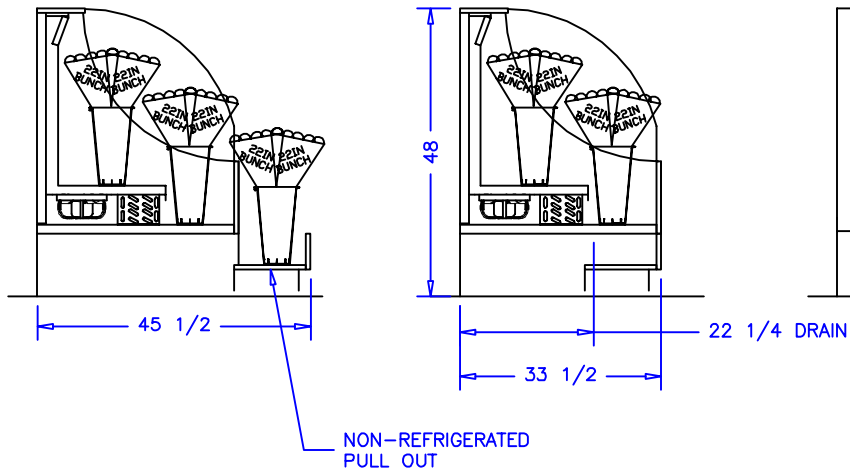

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):		DATE:		 <b>börger systems</b>	
SIGNATURE:					
		SCALE: 1:32	DRAWN BY: D HUNT		
		DATE: 8-22-13	CHECKED BY:		
		8FT LPM W/DRAWERS			
DATE	REV.	DWG.	INCH		
REVISION	TOL:				
				DRAWING NUMBER P6499	