

LEFT DOORED CASE
SPECIFICATIONS:



REFRIGERATION: 4,025 BTU/hr
SUCTION TEMP: 25° F
LIQUID LINE: 3/8IN ODS
SUCTION LINE: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.
EVAP. FANS: 0.6A
LIGHT BALLAST: 1.88A
CASE TOTAL: 2.28A
MCA: 15.0A

RIGHT DOORED CASE
SPECIFICATIONS:


REFRIGERATION: 4,025 BTU/hr
SUCTION TEMP: 25° F
LIQUID LINE: 3/8IN ODS
SUCTION LINE: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.
EVAP. FANS: 0.3A
LIGHT BALLAST: .94A
CASE TOTAL: 1.24A
MCA: 15.0A

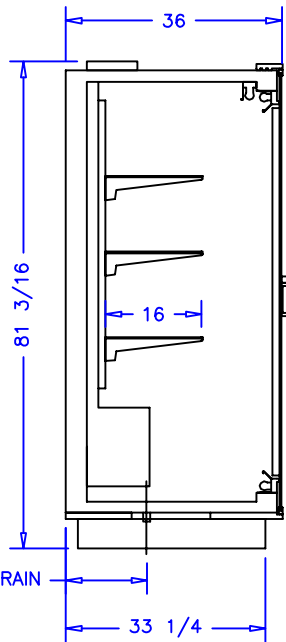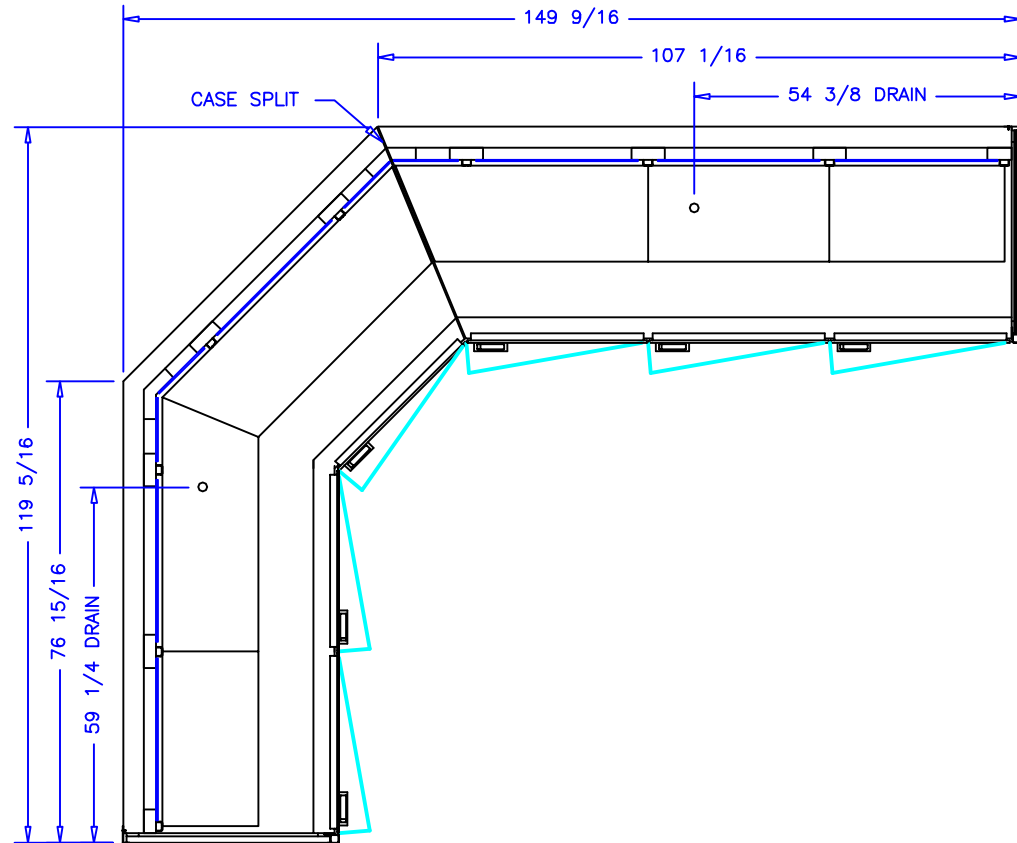

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):		DATE:		 börgeren systems		SCALE: 1:32		DRAWN BY: D HUNT	
SIGNATURE:						DATE: 5-29-14		CHECKED BY:	
				6DR INSD CRNR					
DATE		REV.		DIM:		INCH		DRAWING NUMBER	
REVISION		TOL:						P6667	