



COMPONENT



37X1
COMMERCIAL REFRIGERATOR
LESS CONDENSING UNIT

INITIAL DEFOST SCHEDULE:
6 PER DAY AT 30 MINUTES

CASE SPECIFICATIONS:

REFRIGERATION

LOAD: 1,850 BTU/FT

TOTAL 22,200 BTU/hr

COIL TEMP: 22° F

LIQUID STUB: 3/8IN ODS

SUCTION STUB: 5/8IN ODS




ELECTRICAL 115VAC, 60HZ, 1PH.

EVAP. FANS: 3.6A

LIGHTS: 1.0A

TOTAL: 4.6A

MCA: 15.0A

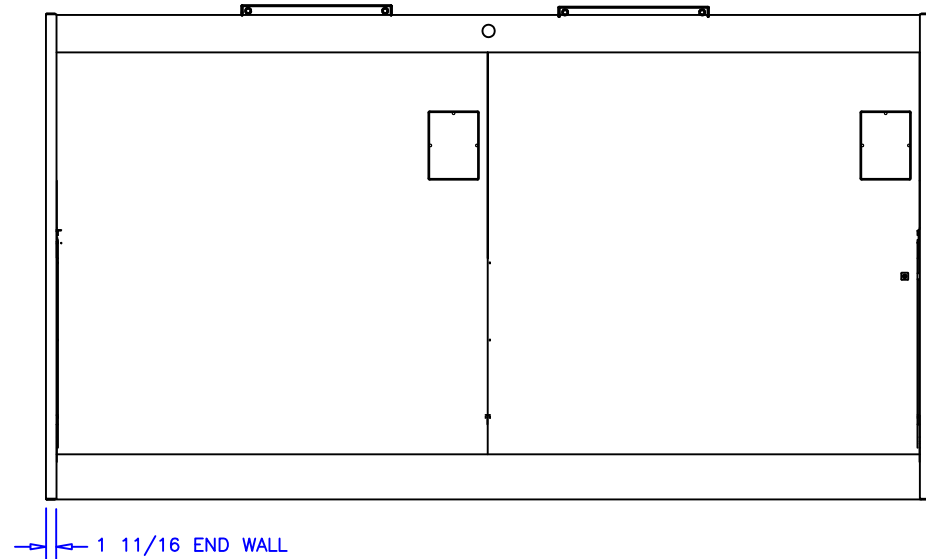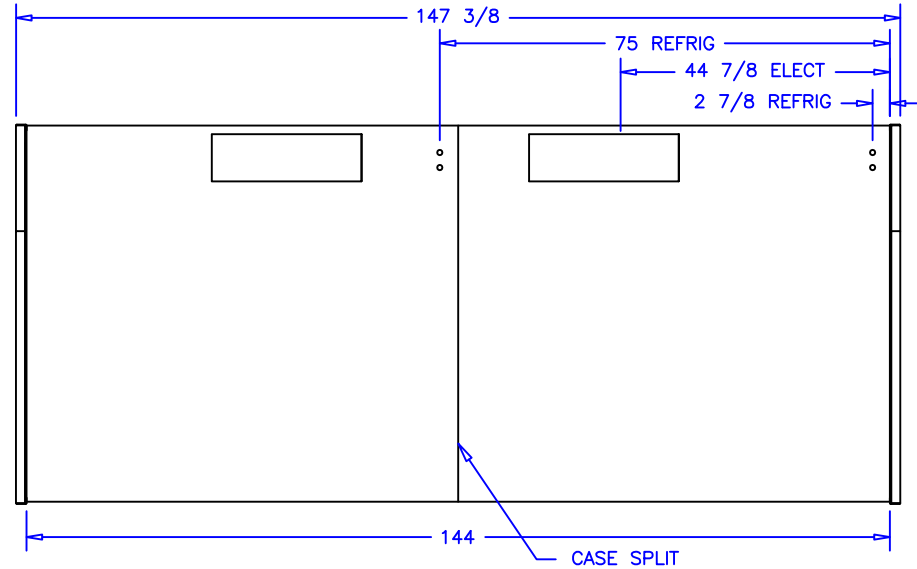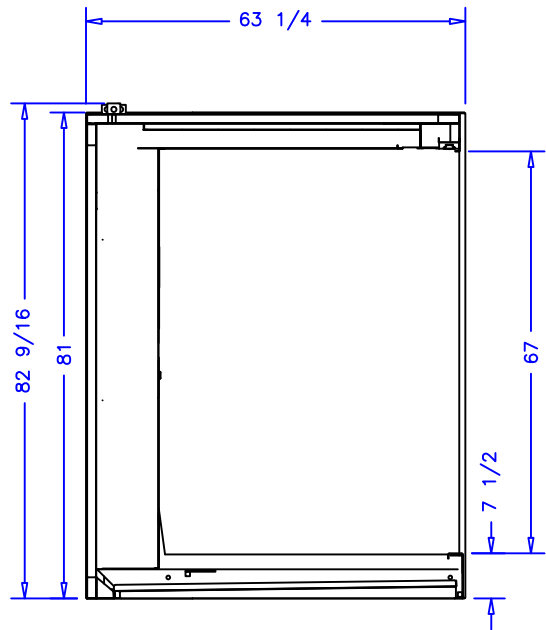

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "Q" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFOST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

AUTHORIZATION (PRINT):	DATE:				
SIGNATURE:		SCALE: 1:32		DRAWN BY: D HUNT	
		DATE: 6-1-12		CHECKED BY:	
		9-28-12 DRH	12FT VERTICAL CAKE		
		8-23-12 DRH			
		DATE	REV.	DIM.	INCH
		REVISION	TOL:		
					DRAWING NUMBER P6239