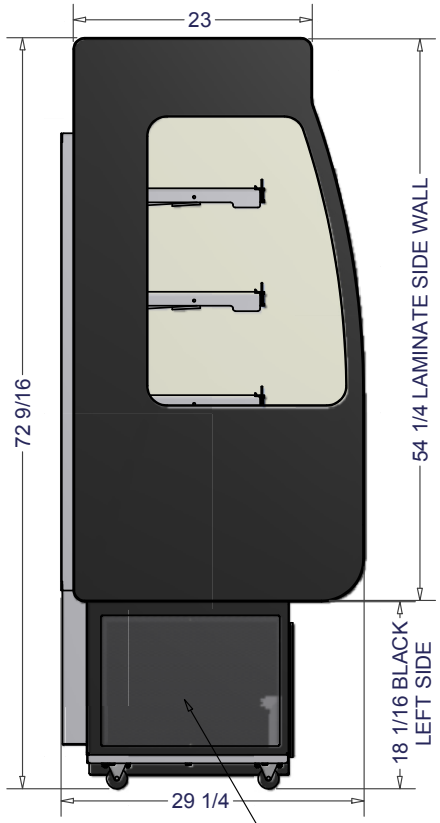

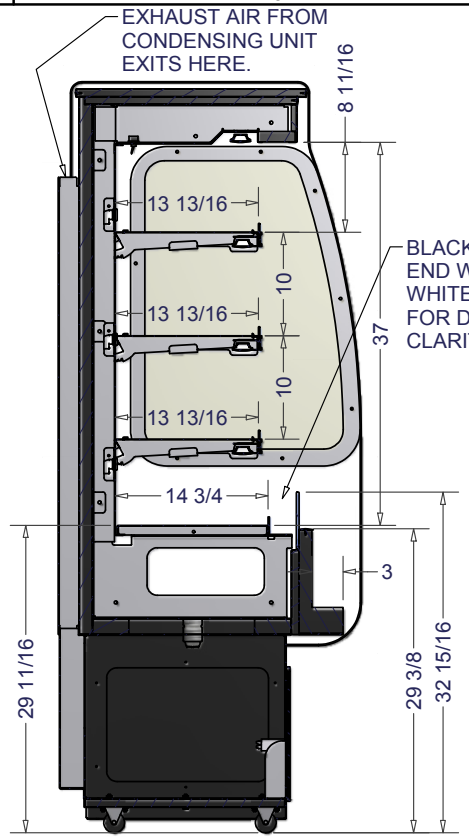

SECTION A-A
SCALE 1/12

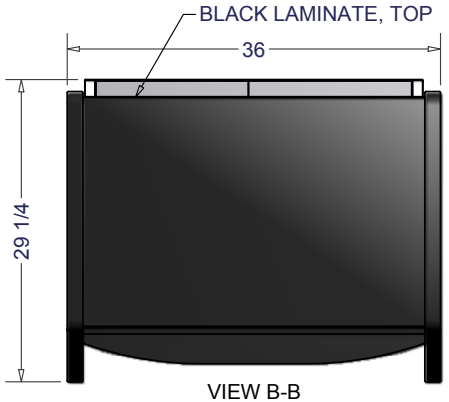

VIEW B-B
SCALE 1/12

NOTES:

1. OPTIONS NOT SHOWN ON DRAWING SHOULD BE LISTED IN WRITTEN PROPOSAL AND LISTED ON PURCHASE ORDER.
2. ELEC. CONNECTION: 115V/230V, 4x4 SUPPLY BOX AS NEEDED.
3. EXPANSION VALVES: SPORLAN "BQ" SERIES STANDARD UNLESS OTHERWISE SPECIFIED.
4. DEFROST CONTROL: REMOTE CASES (N/A, DIGITAL CASE CONTROLERS AVAILABLE), OPTIONAL CONDENSING UNIT (DIGITAL CASE CONTROLER).
5. THERMOSTATS & LIQUID LINE SOLENOID VALVES: OPTIONAL.
6. DRAIN: 1 1/2 INCH PVC.
7. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

CASE SPECIFICATIONS:

REFRIGERATION ESTIMATIONS:
LOAD: 4,300 BTU/hr
COIL TEMP: 22° F
LIQUID STUB: 3/8IN ODS
SUCTION STUB: 5/8IN ODS

ELECTRICAL 115VAC, 60HZ, 1PH.
EVAP. FAN: 0.30A
LED LIGHTS: 1.2A
1/2HP COND. UNIT: 9.2A
EVAP PAN: 4.2A
EVAP PAN FAN: 0.3A
TOTAL: 15.2A
MCA: 18.2A

2IN NON-SWIVELING CASTER, TYP. (4), MIGHT AFFECT THE STABILITY OF THIS CASE.

REMOVABLE AIR FILTER FOR AIR FLOW TO CONDENSING UNIT

NSF COMPONENT

c UL us LISTED
CONFORMS TO 37X1 COMMERCIAL REFRIGERATOR

merchandising systems borgen
Borgen Systems
1901 Bell Avenue, Suite 2
Des Moines. IA 50315
www.borgensystems.com

DATE: 11/8/2012	SCALE 1/12	DRAWN BY: shaneh

3FT Inline

DIM: INCH		DRAWING NUMBER: P6241
TOL: +/- 1/32		